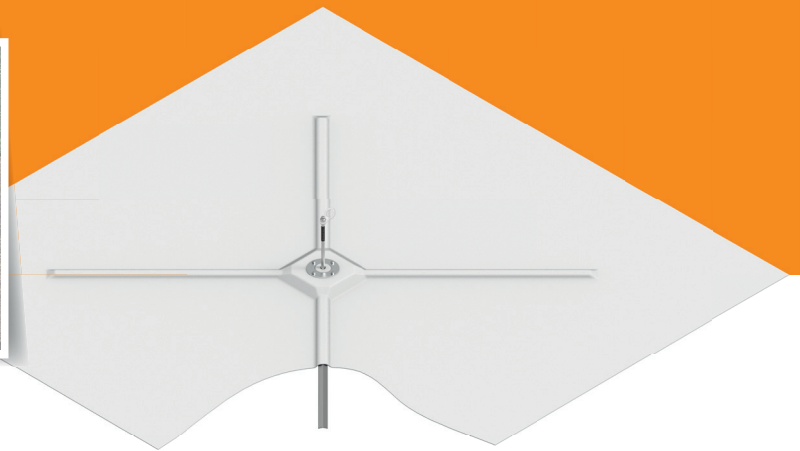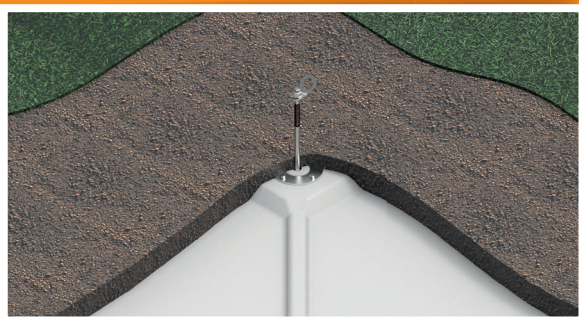NEW FOR GREEN AND GRAVELLED

QUAD-30-300

Self supporting – (system) post

The new self supporting post QUAD-30 from INNOTECH was specially developed for green and gravelled roofs.
The installation is without roof perforation which is a huge advantage of this product. There are no interventions into the building's physics and the associated avoidance of cold spots. With the product development of QUAD-30, INNOTECH

combines security sustainability and offers a visually unobtrusive solution for fall protection on environmentally friendly green roofs.

- For green and gravelled roofs

- Single anchor point or end-/corner or intermediate post in the INNOTECH rail system

- Self supporting through substrate or gravel

- Quick and easy installation independent of the roof construction

- Installation without roof perforation, without interventions into the building's physics (no cold spots), no scouring or gluing work requiredjederzeit dachdurchdringungsfrei nachrüstbar

- Nutzungsdauer Vlies: max. 100 Jahre

- When used as single anchor point, a UNI-EAP-10-25 must be additionally ordered

- Post spacing max. 3 m when used with Taurus rail system.

- Certified according to the latest standards:

  EN 795:2012 TYP D and E

Self supporting – (system) post

QUAD | GREEN ROOF POST

QUAD-30-300
SELF SUPPORTING (SYSTEM) POST FOR RAIL SYSTEM ANCHOR POINT ON GREEN AND GRAVELLED ROOFS

Material: Stainless steel V2A (AISI 304), PP-fleece 3x3 m
Mountable on: green and gravelled roof
Auflast: ≥ 56 kg/m²
Bearing load: ≥ 56 kg/m²
Post dimensions: 300 mm, Ø 16 mm
Base plate size: 235 x 235 x 4 mm

ACCESSORY

UNI-EAP-10-25
UNIVERSAL ANCHORAGE EYE

Substructure: QUAD-30-300
Usable thread length: 29 mm
Thread: M16 (DIN 933, ISO 4017)
Material: Stainless steel V2A (AISI 304)

QUICK AND EASY INSTALLATION INDEPENDENT OF THE ROOF CONSTRUCTION

UPGRADABLE WITHOUT ROOF PERFORATION AT ANY TIME

SELF SUPPORTING THROUGH SUBSTRATE OR GRAVEL

QUAD-30 / Self supporting – (system) post