

TRANSLATION

(1) **Type Examination Certificate**

(2) No. of the Type Examination Certificate: **ZP/B166/20**

(3) Product: **Anchor device type A**
Type: **STA**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 20-199.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2025-09-17.

DEKRA Testing and Certification GmbH
Bochum, 2020-09-18

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B166/20
- (13) 13.1 Subject and Type
Anchor device type A
Type: STA

13.2 Description

The anchor device of STA (Fig. 1 to 10) is used to simultaneously protect a maximum of four people against falls from a height. The anchor device consists of a base plate and a support pipe which is welded to the base plate. At the upper end of the support an anchor eyelet is securely screw-fastened by means of a hexagonal screw and a counter nut (M 16). The user can use his personal protective equipment to secure himself against falls from a height by means of this eyelet.

Using the respective fastening elements, the anchor device of type STA is fastened directly to the structure to suitable surface of sufficient strength. The device is made of galvanised steel and is intended for mounting to roofs, walls and ceilings. Therefore, load to the device can be exerted from all directions.

Moreover, the product labelled as type STA is used as a component of the rope system type INNOTECH ALLinONE and as a component of the rail system type INNOTECH TAURUS.

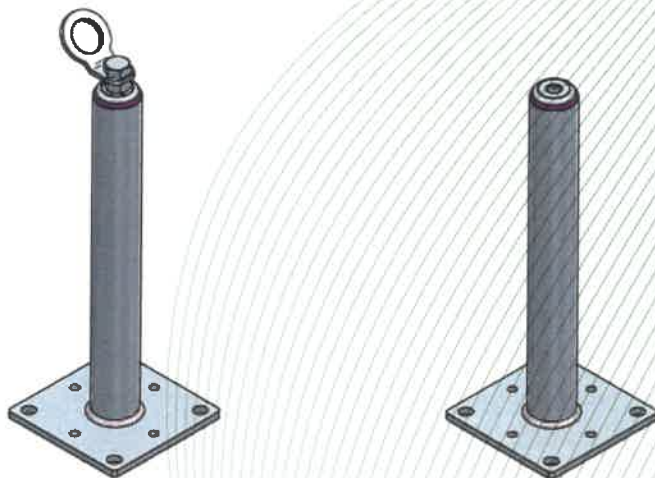


Fig. 1 – 2: Anchor device, type: STA-10

TRANSLATION

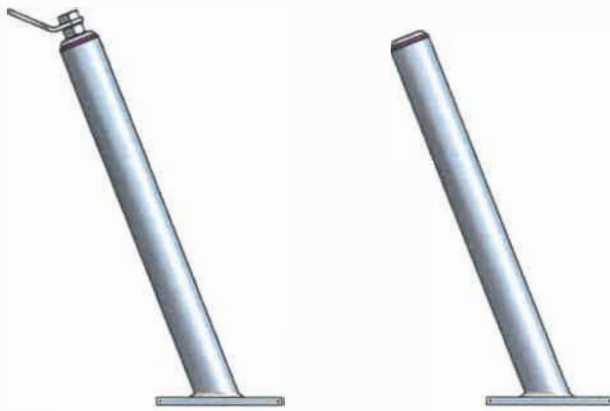


Fig. 3 – 4: Anchor device, type: STA-11

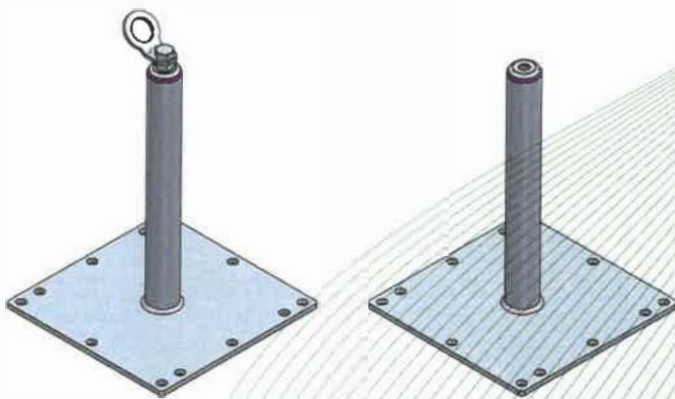


Fig. 5 – 6: Anchor device, type: STA-12

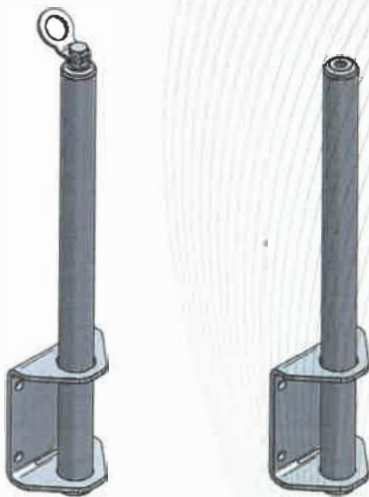


Fig. 7 – 8: Anchor device, type: STA-16

(14) Report

PB 20-199, 2020-09-18