


Portagomma femmina
Hose connector F

Omologato RINA
RINA validated

Conforme alla norma
Compliant with
UNI EN ISO 9093-1

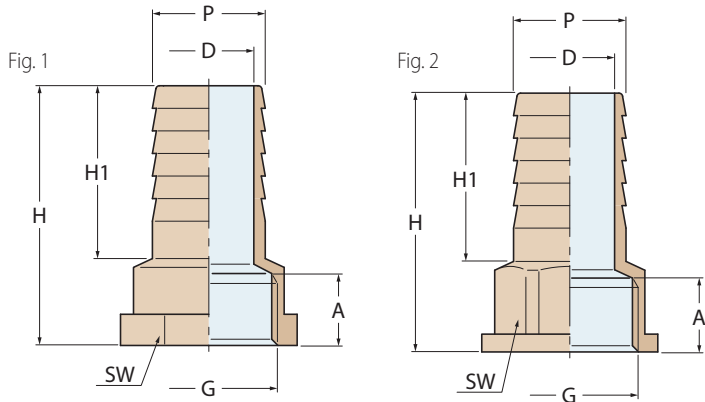

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

1005	1	1	1	1	1	1	1	1	1	1	1	1
1005N												
Fig.	1	1	1	1	1	1	1	1	1	1	1	1
Weight (gr)	16	18	20	20	25	27	27	30	30	35	35	40
SW	16	16	16	16	16	20	20	20	20	25	25	25
H	38	43	43	38	43	43	43	43	43	44	44	44
H1	25	30	30	25	30	30	30	30	30	30	30	30
A	11	11	11	11.5	11.5	11.5	11.5	11.5	11.5	12	12	12
D	5	6.5	9.5	5	6.5	8.5	9.5	10.5	11.5	6.5	9.5	11.5
P	8	10	13	8	10	12	13	14	15	10	13	15
G	1/4"	1/4"	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	1/2"

Ottone sabbiato
Yellow brass

1005N



Ottone nichelato
Nickel-plated brass

1005	1	1	1	1	1	2	2	2	2	2	2	2
1005N												
Fig.	1	1	1	1	1	2	2	2	2	2	2	2
Weight (gr)	40	60	50	52	58	60	80	115	130	150	180	190
SW	25	25	30	30	30	30	30	38	38	38	47	47
H	44	46	45	45	47	47	54	55	55	59	64	64
H1	30	32	30	30	32	32	38	38	38	42	45	45
A	12	12	13	13	13	13	13	14	14	14	15	15
D	12.5	15	9.5	12.5	13.5	15	20	20	25	26	26.5	29.5
P	16	20	13	16	19	20	25	25	30	32	32	35
G	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"	1"	1 1/4"	1 1/4"

1005	2	2	2	2	2	2	2	2	2	2	2	2
1005N												
Fig.	2	2	2	2	2	2	2	2	2	2	2	2
Weight (gr)	200	200	220	220	240	260	240	310	330	395	510	730
SW	47	47	53	53	53	53	51	52	63	63	78	91
H	64	64	64	64	67	68.5	70	74	70	75	83	99
H1	45	45	45	45	48	49.5	48	50	46	53	58	74
A	15	15	15	15	15	15	16	16	18	19	21	21
D	32.5	34.5	32.5	34.5	39.5	44.5	39	43	43	52	62	72
P	38	40	32	35	38	40	45	50	50	60	70	80
G	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2 1/2"	3"