


### Filtro depurazione acqua serie "Ionio" con coperchio in metallo Water strainer "Ionio" series with metal cover

Filtro omologato RINA MAC  
RINA MAC certificate

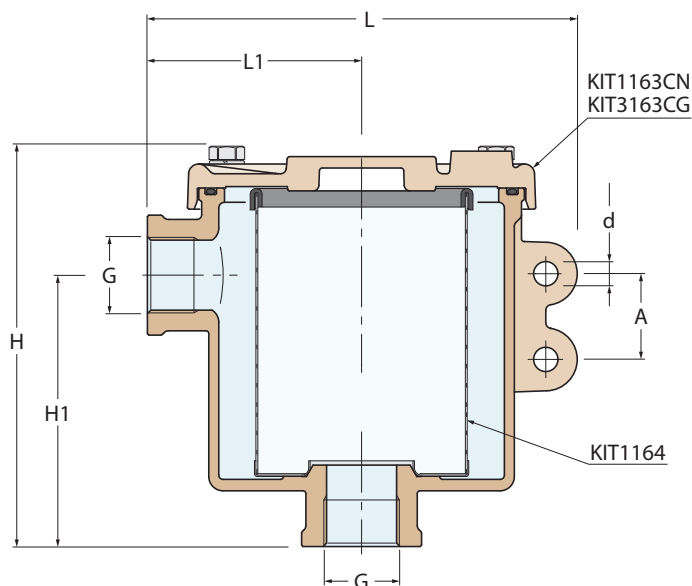

FILETTATURE / THREAD :  
G = ISO 228/1 (BS 2779)

	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
<b>1166</b>	■	■	■	■	■	■	■	■
Weight (gr)	2900	2800	3600	4400	6700	10200	10800	15800
<b>3166</b>	■	■	■	■	■	■	■	■
Weight (gr)	1000	970	1250	1500	2100	3280	3600	4850
d	8.5	8.5	8.5	8.5	10	11	11	11
A	30	30	40	40	50	60	80	100
H	143	143	165	176	215	243	276	326
H1	94	94	106	111	135	150	177	211
L1	75	75	85	91	106	126	129	142
L	151	151	167	180	213	252	255	277
<b>G</b>	<b>3/4"</b>	<b>1"</b>	<b>1 1/4"</b>	<b>1 1/2"</b>	<b>2"</b>	<b>2 1/2"</b>	<b>3"</b>	<b>4"</b>




Bronzo nichelato  
Nickel-plated bronze ■

**3166**



Alluminio anodizzato nero  
Solo su richiesta speciale  
Black anodized aluminium  
Upon special request only ■

Diagramma portate - perdite di carico  
Flow rate - loss of pressure diagram

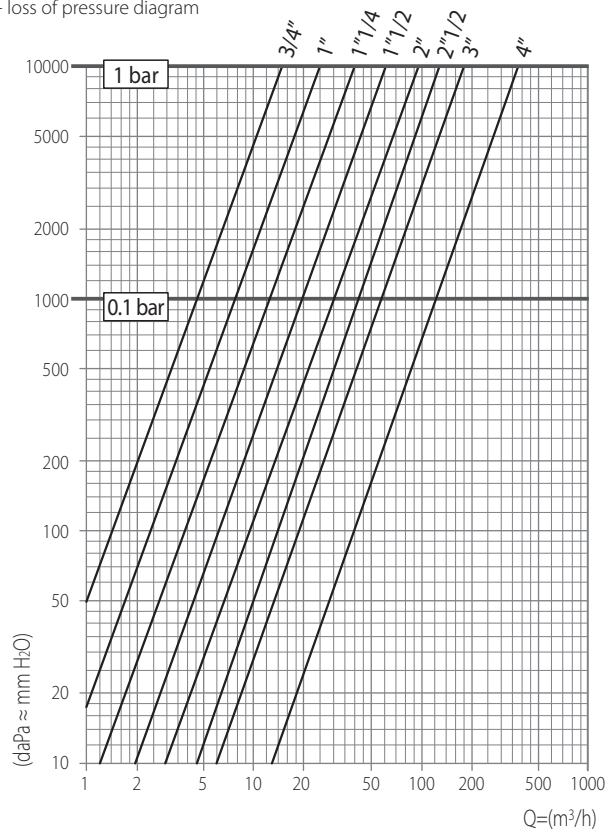

Corpo in bronzo nichelato / Alluminio anodizzato nero  
Nickel-plated bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L  
AISI 316L stainless steel inside filter

Coperchio in bronzo nichelato / Alluminio anodizzato nero  
Nickel-plated bronze / Black anodized aluminium cover

Guarnizioni in neoprene  
Neoprene o-ring

G	0.1 bar	1 bar
3/4"	4650	14900
1"	7950	25500
1 1/4"	12100	38200
1 1/2"	19100	61250
2"	30000	96200
2 1/2"	42600	134000
3"	58400	184000
4"	123000	390000

Portate di acqua attraverso il filtro pulito - lt/h  
Flow-rate capacity through the clean filter - lt/h