

MAJA Downlight

IP65



Power
3,6 w

Efficiency
56 Lm/w

Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
10-32 VDC

Material
Stainless steel
Aluminum




MAJA ROUND (SS)
Rustfrit stål



MAJA SQUARE-RECT (SS)
Rustfrit stål



MAJA SQUARE-OVAL (SS)
Rustfrit stål

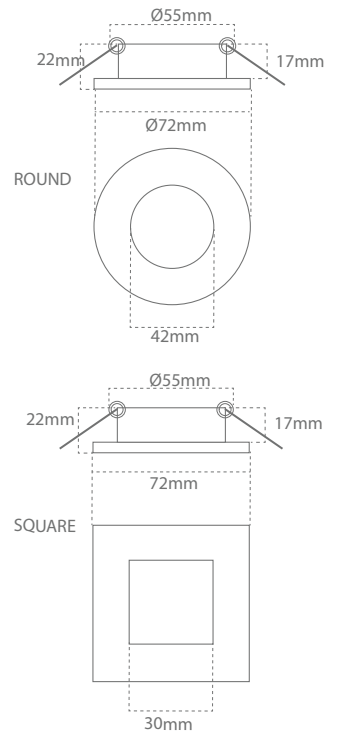

MAJA ROUND (SS-WH)
Rustfrit stål malet hvid



MAJA SQUARE-RECT (SS-WH)
Rustfrit stål malet hvid



MAJA SQUARE-OVAL (SS-WH)
Rustfrit stål malet hvid



MAJA ROUND W/COVER (SS)
Rustfrit stål

Product code	Lumen output	Beam	Power	CCT	CRI
MAJA-ROUND-SS	204 lm	90°	3,6W	3000K	> 85
MAJA-ROUND-SS-WW/RED	204 lm	90°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-ROUND-SS-WH	204 lm	90°	3,6W	3000K	> 85
MAJA-ROUND-SS-WH-WW/RED	204 lm	90°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-RECT-SS	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-RECT-SS-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-RECT-SS-WH	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-RECT-SS-WH-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-OVAL-SS	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-OVAL-SS-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85
MAJA-SQUARE-OVAL-SS-WH	204 lm	85°	3,6W	3000K	> 85
MAJA-SQUARE-OVAL-SS-WH-WW/RED	204 lm	85°	3,6W / 1,8W RED	3000K / RED	> 85

Feature

- IP65 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Stainless steel ensures corrosion free product in damp environment
- PWM-dimmable
- Optional in Warm White 3000K with RED light

Material

- SS: Stainless steel
- Aluminium

Benefit

- High reliability
- Maintenance free

Application

- Marine light



Mounted with
springs or screws