


PRO-TEC 20W50

MINERAL OIL.

Multigrade engine oil, suitable for all diesel engines in all working conditions and during the whole year. Due to the high content of active components, this oil can be used all year round in the toughest conditions. Because of the high resistance against ageing, it is possible to apply longer drain periods.

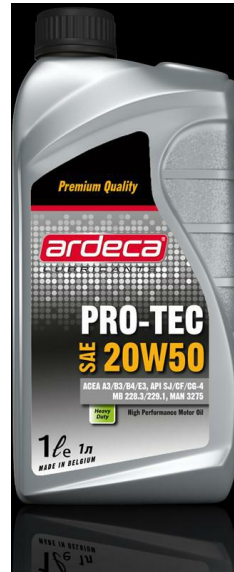

★ APPLICATIONS

This oil is suitable for all diesel engines with natural aspiration or turbocharging, in all working conditions in all seasons and long drain periods. It is also suitable for most gasoline engines.

★ PERFORMANCE LEVEL

- ACEA: A3/B3-10
- ACEA: A3/B4-08
- ACEA: E3-96 Issue 4
- ALLISON : C4 Level
- API: CG-4/SJ
- MACK: EO-L
- MAN: M3275-1
- MB: 228.3
- MB: 229.1
- MTU: Type 2
- VOLVO: VDS-2

★ FEATURES

Total engine protection : performance in keeping the engine clean.

Drain interval extension : long period between oil change.

★ CHARACTERISTICS

	unit	average value
Density at 15 °C	kg/l	0.885
Viscosity 40 °C	mm ² /s	151.00
Viscosity 100 °C	mm ² /s	17.50
Viscosity Index		125
Flash Point COC	°C	238
Pour Point	°C	-24
Total Base Number	mgKOH/g	10.2
Sulphate Ash	%	1.29
Viscosity -15 °C	mPas	8000

★ PACKAGING



12x1L



4x4L



3x5L



20L



60L



210L



IBC

Vroman NV - Oudenaardestraat 49 | 8570 Vichte | Belgium

T +32 56 72 62 29 - F +32 56 72 67 37

E info@ardeca-lubricants.be