


## SYNTH ECO 5W20

### SYNTHETIC MOTOR OIL.

This is a full synthetic lubricant based on carefully selected very high quality base oils, providing outstanding wear and sludge protection, even under the most severe driving conditions. Due to its enhanced frictional properties, improved fuel economy is obtained.

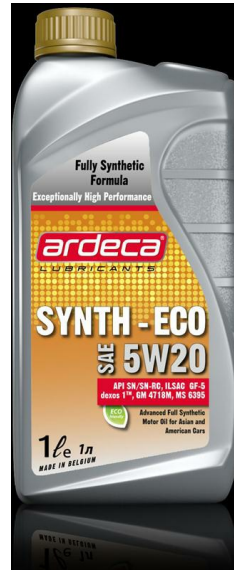

### ★ APPLICATIONS

This motor oil has been specially designed to meet the latest requirements for most American and Asian passenger cars, SUV's and light vans. Originally intended for fuel-injected gasoline engines, without turbo-charging, and with multi-valves.

### ★ PERFORMANCE LEVEL

- API: SN
- FORD: WSS-M2C945-A
- GM: dexos 1
- ILSAC: GF-5

### ★ FEATURES

Total engine protection : performance in keeping the engine clean.

Fuel economy : superior fuel economy.

Cold start : excellent fluidity at low temperature.

## ★ CHARACTERISTICS

	unit	average value
Density at 15 °C	kg/l	0.852
Viscosity -30 °C	mPas	4920
Viscosity 40 °C	mm <sup>2</sup> /s	48.20
Viscosity 100 °C	mm <sup>2</sup> /s	8.57
Viscosity Index		156
Flash Point COC	°C	234
Pour Point	°C	-45
Total Base Number	mgKOH/g	7.9
Sulphate Ash	%	0.89

## ★ PACKAGING



12x1L



4x4L



3x5L



20L



60L



210L



IBC

Vroman NV - Oudenaardestraat 49 | 8570 Vichte | Belgium

T +32 56 72 62 29 - F +32 56 72 67 37

E [info@ardeca-lubricants.be](mailto:info@ardeca-lubricants.be)