


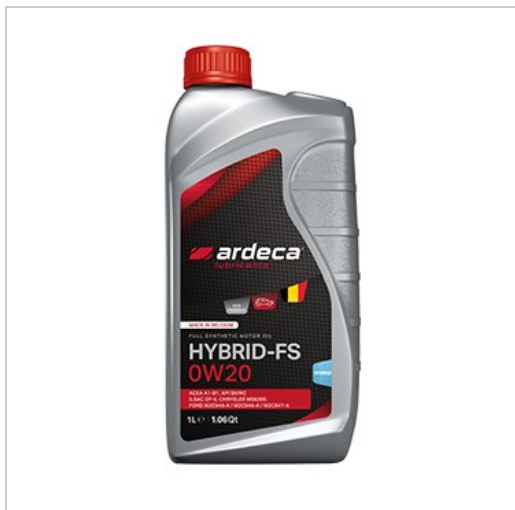

Performance level

- | ACEA: A1-B1
- | API: SQ Resource Conserving
- | ILSAC: GF-7A
- | CHRYSLER: MS6395
- | FORD: M2C945-A / M2C946-A / M2C947-A

HYBRID-FS 0W-20

This is a Fully synthetic lubricant based on carefully selected very high quality base oils, offering the highest levels of fuel economy in passenger cars. Due to its carefully selected base oils and premium additives, it is designed to deliver outstanding engine protection against wear and deposits. Its exceptionally low viscosity allows it to be used the year round, also during very low temperatures in the wintertime.



Applications

This product has been specifically designed to meet the challenging requirements of hybrid cars, where fuel efficiency and reduction of CO2 emissions is important. It provides the necessary performance for the latest US and Asian passenger car requirements (e.g. Honda, Toyota, Mitsubishi).

It is suitable for hybrid cars when the OEM specifications are met.

Characteristics

	Unit	Average Value
Density at 15°C	kg/l	0.849
Viscosity 40°C	mm²/s	45.6
Viscosity 100°C	mm²/s	8.69
Viscosity -35°C	mPas	5710
Viscosity index		173
Flash point COC	°C	222
Pour point	°C	-48
Total base number	mgKOH/g	8.1
Sulphated ash content	%	0.88

Packaging

