


DS-2CV1021G0-IDW1/NF (T) 2 MP IR Fixed Bullet Wi-Fi Network Camera



Key Features

- 1/2.8" progressive scan CMOS
- 1920 × 1280@25fps
- 2.8 mm fixed lens
- Color: 0.01 Lux @ (F1.2, AGC ON), 0.028 Lux @ (F2.0, AGC ON)
- 3D DNR
- Up to 30 m IR range
- Built-in Wi-Fi
- Mobile monitoring via Hik-Connect
- IP66

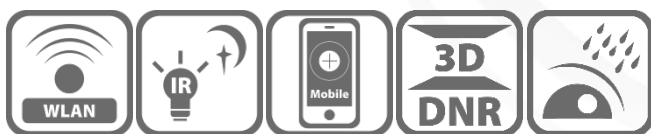

Specifications


Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0.028Lux @ (F2.0, AGC ON)
Shutter Speed	1/3 s to 1/100,000 s
Slow Shutter	Yes
Auto-Iris	No
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	DWDR
3-Axis Adjustment	Pan: 0° to 360°, tilt: -90° to 90°, rotate: 0° to 90°
Lens	
Focal length	2.8 mm
Aperture	F2.0
Focus	Fixed
FOV	Horizontal FOV: 114.5°, vertical FOV: 62°, diagonal FOV: 135.5°
Lens Mount	M12
IR	
IR Range	Up to 30 m
Wavelength	850 nm
Compression Standard	
Video Compression	Main stream: H.264 Sub stream: H.264
H.264 Type	Baseline Profile/Main Profile
H.264+	No
H.265 Type	No
H.265+	No
Video Bit Rate	32 Kbps to 8 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32 to 160Kbps(MP2L2)
Smart Feature-set	
Region of Interest	No
Image	
Max. Resolution	1920 × 1280
Main Stream	50Hz: 25fps (1920 × 1280, 1280 × 720, 704 × 576, 640 × 480)
Sub Stream	50Hz: 25fps (704 × 576, 640 × 480, 352 × 288, 320 × 240)
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser
Image Enhancement	BLC, 3D DNR
Day/Night Switch	Day, night, auto, scheduled
Network	
Network Storage	No
Alarm Trigger	Motion detection, video tampering, illegal login
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, IPv6,

	UDP, QoS, Bonjour
General Function	Heartbeat, mirror, password protection, privacy mask, watermark
Firmware Version	V5.5.60
API	ONVIF (PROFILE S, PROFILE G), ISAPI
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator and User
Client	iVMS-4200, iVMS-4500, iVMS-5200, Hik-Connect
Web Browser	IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+
Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Audio	1 Built-in mic, mono sound
On-board storage	No
Reset Button	No
Wi-Fi	
Wireless Standards	IEEE 802.11b/g/n
Frequency Range	2.4 GHz to 2.4835 GHz
Channel Bandwidth	20 MHz/40 MHz
Protocols	802.11b: CCK, DQPSK, DBPSK 802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transfer Rates	11b: 11 Mbps, 11g: 54 Mbps, 11n: up to 150 Mbps
Wireless Range	Up to 50 m (The performance varies based on actual environment)
Audio	
Environment Noise Filtering	Yes
Audio Sampling Rate	8 kHz/16 kHz
General	
Operating Conditions	-30 °C to +60 °C (-22°F to +140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 25%, 5.5 mm coaxial power plug
Power Consumption and Current	12 VDC, 0.4 A, Max: 5 W
Ingress Protection	IP66
Material	Front cover: metal, back cover: plastic
Dimensions	Camera: 99 mm × 68 mm × 66 mm (3.9" × 2.7" × 2.6") With package: 172 mm × 110 mm × 99 mm (6.8" × 4.3" × 3.9")
Weight	Camera: 272 g (0.6 lb.) With package: 517 g (1.1 lb.)

Available Model:

DS-2CV1021G0-IDW1/NF (2.8 mm) (T)

Dimensions

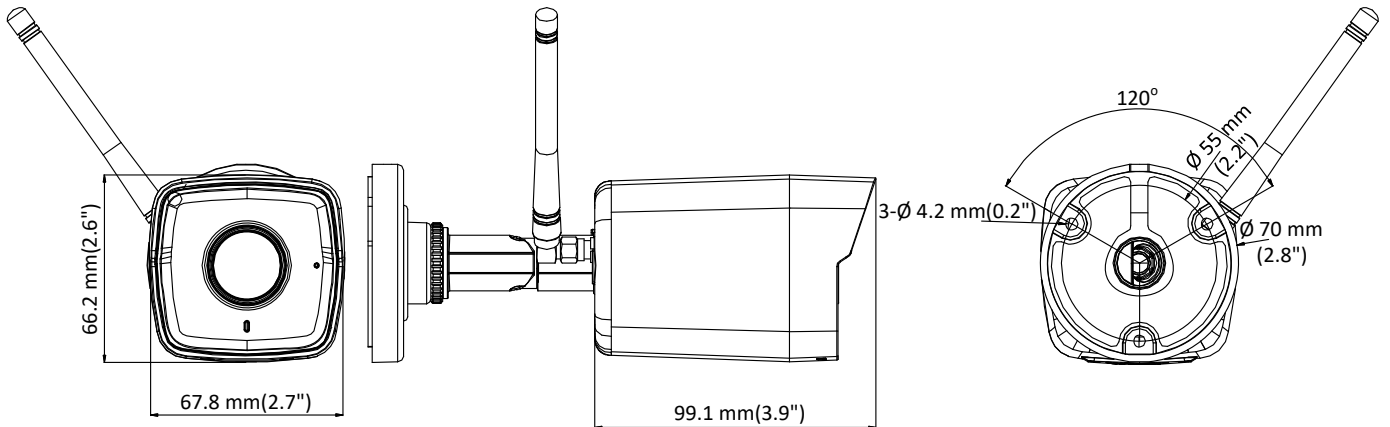

Accessory



**DS-1280ZJ-XS
Junction Box**

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
sateru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

DS-7100NI-K1/W/M Series Wi-Fi NVR



Features and Functions

Video Input and Transmission

- Up to 4/8 IP cameras (max. incoming bandwidth: 50 Mbps)
- Live view of the connected camera at up to 4 MP resolution

Compression and Recording

- H.264, H.265, H.264+, and H.265+ compression.
- Full channel recording at up to 4 MP resolution

Video Output

- HDMI/VGA output with up to 1920 × 1080 resolution

Storage and Playback

- 1 SATA interface for HDD with up to 6 TB capacity
- Up to 4/8-ch synchronous playback
- Smart search for efficient playback

Smart Function

- Supports line crossing and intrusion VCA (Video Content Analytics) events for IP cameras

Network & Ethernet Access

- Hik-Connect for easy network management
- One 100M Ethernet network interface

Wi-Fi Features


- Provides Wi-Fi function.
- Up to 16 terminals, including mobile phone and laptop, can access NVR via Wi-Fi
- Dual external antenna design offers more powerful and stable signal.



Specifications

Model		DS-7104NI-K1/W/M	DS-7108NI-K1/W/M
Video/Audio input	IP video input	4-ch	8-ch
	Incoming/outgoing bandwidth	50/40 Mbps	
Video/Audio output	HDMI/VGA output	1-ch, resolution: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Audio output	1-ch, RCA (linear, 1 KΩ)	
Decoding	Recording resolution	4 M/3 M/1080p/1.3 M/720p	
	Synchronous playback	4-ch	8-ch
	Capacity	2-ch@1080p / 1-ch@4 MP	
Hard disk	SATA	1 SATA interface	
	Capacity	Up to 6 TB capacity for each disk	
Wireless parameters	Frequency band	2.4 GHz	
	Antenna structure	2 × 2MIMO	
	Transmission speed	144 Mbps	
	Transmission standard	IEEE 802.11b/g/n	
External interface	Network interface	1, RJ45 10/100M Ethernet interface	
	USB interface	Rear panel: 2 × USB 2.0	
General	Power supply	12 VDC	
	Consumption (without HDDs)	≤ 12 W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)	
	Working humidity	10% to 90%	
	Dimensions (W × D × H)	260 × 246 × 48 mm (10.2" × 9.7" × 1.9")	
	Weight (without HDDs)	≤ 1 kg (2.2 lb)	

Physical Interfaces

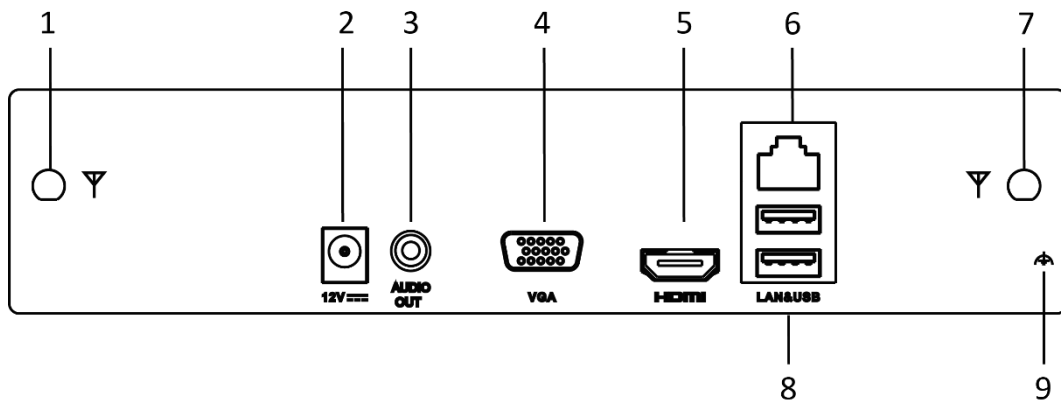

No.	Name	No.	Name
1	Wi-Fi antenna	6	LAN
2	Power supply	7	Wi-Fi antenna
3	Audio out	8	USB
4	VGA interface	9	Ground
5	HDMI interface		

Available Models

DS-7104NI-KI/W/M,
DS-7108NI-KI/W/M

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
sateru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com