


Construction is made from glued wood, stainless and galvanized steel metal, rope and HPL laminate.

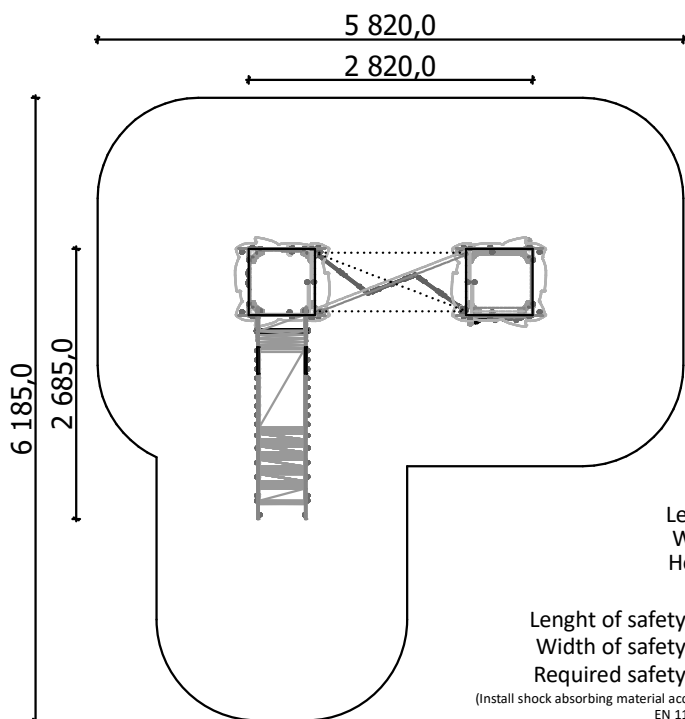

Length: 2 820 mm  
Width: 2 685 mm  
Height: 2 785 mm

Length of safety area: 5 820 mm  
Width of safety area: 6 185 mm  
Required safety area: 26,31 m<sup>2</sup>


(Install shock absorbing material according to EN 1176:2017)




**6**  
children




**6 <**  
age



**1,60 m**  
height of fall



**18 kg**  
(heaviest part)




**... kg**




**....**  
(without excavation and concreting)

**Do not place stainless steel slide directly to south!**

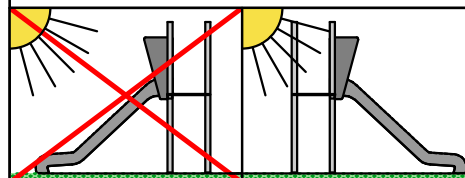


Foundation should be accessible for maintenance.



Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performed once in a week in high vandalism risk area.

Maintenance is required once in every 3 months, depending on usage.

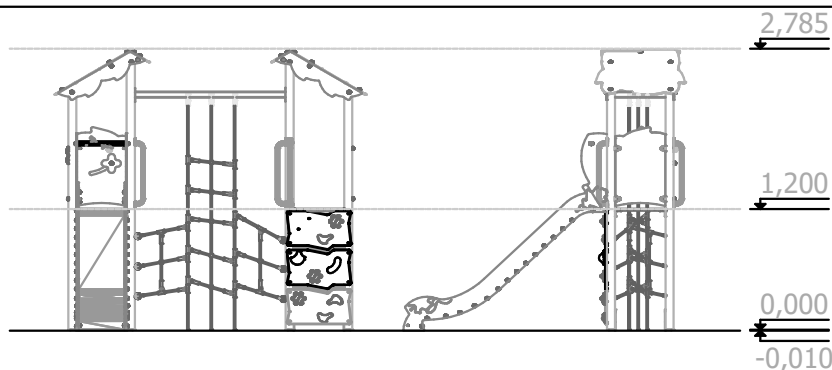

Transportation:

1 (one) palette:  
2 800 x 1 000 x 500 mm

Spare parts:

All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176:2017

Manufactured according:  
07.11.2019.



EN 9100  
BUREAU VERITAS  
Certification

