

INSTALLATION INSTRUCTIONS

ROADTHUNDER SPEAKER PODS BY MTX, CHROME

2710

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

WARNING THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

1 3" Speaker POD



1 3" Amp Speaker POD



1 Wire Harness



2 M8-1-1/4 X 45 Cap Screw



4 M8 Internal Tooth Lock Washer



2 Assembly: 1" Handlebar Clamp



2 Clamp Shim, 1100-0 Alum, For 7/8" Bars



1 T-Tap Quick Connect Female



1 10 Amp Mini Fuse



4 Cable Ties



YOU WILL ALSO NEED:

Metric Hex, Allen wrenches, Pliers

NOTICE THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

WHEN CONNECTING POWER AND GROUND WIRES ENSURE THAT THE RED POWER WIRE IS FUSED AT THE POINT WHERE IT IS CONNECTED TO THE VEHICLE'S BATTERY. FAILURE TO DO SO CAN RESULT IN DAMAGE TO THE VEHICLE IF A SHORT CIRCUIT DEVELOPS BETWEEN THE VEHICLE CONNECTION POINT AND THE PRODUCT.

KURYAKYN.COM

INSTALLATION INSTRUCTIONS

ROADTHUNDER SPEAKER PODS BY MTX, CHROME

2710

-CONTINUED-

INTRODUCTION

Thank you for purchasing this Kuryakyn RoadThunder Speaker Pods by MTX that are designed to work with most Bluetooth enabled devices including iPhone® and Android® smartphones and tablets. This easy to install and use, all in one unit is capable of transforming your Bluetooth enabled mobile device into the center of your vehicle's audio system. Designed to mount on any motorcycle handle bars with a 7/8" or 1" diameter. Congratulations and enjoy the ultimate audio experience!

FEATURES

3" SPEAKER PODS SPECS:

- High-impact ABS enclosures in chrome or satin black finish
- Low current draw: 5 amps
- Overall height when mounted is 4.8"
- Includes 3.5 mm input and output connectors
- 1-1/4" handlebar clamp mount available separately, P/N 1468 Chrome, 2792 Satin Black
- 100W Peak Music Power

INSTALLATION

The RoadThunder Speaker Pods can be used with any 12-volt battery and can be mounted to a variety of bars using the included hardware. Mount the speakers where they have sufficient clearance, position the speakers so the speakers are directly at the rider.

MOUNT BRACKETS TO HANDLEBAR FIRST, THEN INSTALL SPEAKER PODS

- STEP 1** Determine the diameter of the handlebar and use either the 7/8" Adaptor with 1" Bracket or just the 1" Bracket

Note: If you have a 1-1/4" diameter handlebar you can purchase that part separately on our website.


- STEP 2** Install brackets on handlebars where Sound Bars do not obstruct the riders view. Use hardware that is included with the brackets.

- STEP 3** Once brackets are installed, add the Speaker Pods with the hardware provided:
A) Add the 3" Amp Speaker POD to the left side of rider's perspective & 3" Speaker POD to the right side of rider

Use one of the M8 1-1/4" x 45 Cap Screw provided on each bracket along with two M8 internal Tooth Lock Washers add to top and bottom surface of bracket, do the same on other bracket.

- STEP 4** Adjust the speaker pods so the speakers are directed at the rider's head. To adjust and align the logo on the Speaker Pods mesh screen there is a very small pin size hole located at the bottom of the front ring. Use a small pin or paper clip, press in, and turn the ring. Rotate trim counterclockwise to removed trim ring. Once the ring has been removed, adjust the mesh screen accordingly, then reinstall. Make sure all screws are securely fastened and tightened.

- STEP 5** Connect Speaker Pods to the Wire Harness.



THREE PRONG
CONNECTING OF THE HARNESS



TWO PRONG
CONNECTING OF THE SPEAKER PODS

KURYAKYN.COM

INSTALLATION INSTRUCTIONS

ROADTHUNDER SPEAKER PODS BY MTX, CHROME

2710

-CONTINUED-

Route all harness wires through the bike's frame to the battery and proceed to the next steps in power connection.


POWER CONNECTION

SPEAKER PODS WIRE HARNESS CONNECTION

- STEP 1** Connect the Red wire (with the in-line fuse) power wire from the wire harness to the positive terminal on the battery. The Black wire is a ground wire and needs to be attached to the negative terminal on the battery.

Note: Route and secure the wiring away from any moving parts, pinch points or extreme heat. Keep the included fuse off the fuse holder until all wiring connection have been made and secured.

- STEP 2** Use the included T-Tap Quick Connect Female connector and install directly onto the ACC/Key ignition wire on the motorcycle using a pair of pliers. Then once the T-Tap female connector is installed connect the Orange wire with red male connector onto this T-Tap female connector.

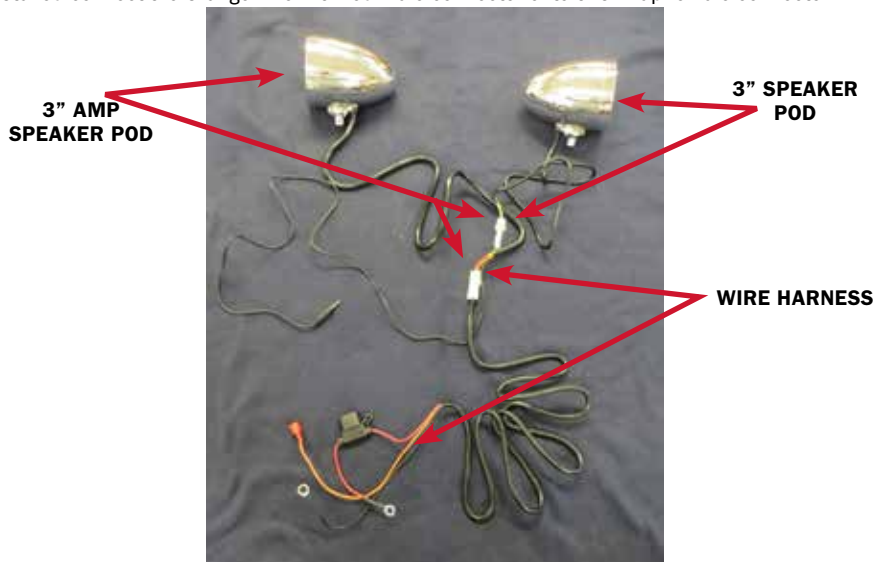

NOTICE

Note: Route and secure the wiring away from any moving parts, pinch points or extreme heat.
Note: Place the included fuse in the fuse holder when all wires are connected and secured.

AUDIO CONNECTION

DIRECT CONNECTION FROM AUDIO SOURCE

- STEP 1** Use the included 3.5mm male connector on the Speaker Pods and connect directly to an audio source.

Note: Please note with this type of connection, the audio source will control the volume of the pods.

INSTALLATION INSTRUCTIONS

ROADTHUNDER SPEAKER PODS BY MTX, CHROME

2710

-CONTINUED-



AUDIO OUTPUT ON SPEAKER PODS

The 3.5mm audio output on the Speaker Pods can be connected to a second Speaker Pods system or any other audio device.

If connected to a second Speaker Pods system, the second set of powered pods will be controlled by the volume setting of the connected audio source. Both sets of Speaker Pods will play at the same volume.

INSTALLATION INSTRUCTIONS

ROADTHUNDER SPEAKER PODS BY MTX, CHROME

2710

-CONTINUED-

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, this is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, you are encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit than the one to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

KURYAKYN.COM

866 277 9598 | INFO@KURYAKYN.COM

454 COUNTY ROAD VV SOMERSET, WI 54025