



INSTALLATION

CHROME LED HALO TRIM RING, 7" for '14-UP

6917

THANK YOU FOR CHOOSING KÜRYAKYN!

PROTECT YOURSELF AND OTHERS FROM POSSIBLE INJURY AND PROPERTY DAMAGE OR LOSS. PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS, AND NOTICES REGARDING THE INSTALLATION, USE, AND CARE OF THIS PRODUCT.

WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Chrome Halo Trim
- 1 LED Halo Light
- 1 Hardware Kit containing:
 - 1 Front Accessory Wiring Adapter
 - 1 LED Halo Extension
 - 2 Dielectric Grease Packs
- 1 Installation Instructions

TOOLS SUGGESTED:

Set of Torx drivers, Phillips head screwdriver

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future reference.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Prepare a soft, clean, and sturdy work surface at a comfortable height near the bike. **Remove the main fuse.**

WARNING

ACCIDENTAL VEHICLE START-UP COULD CAUSE DEATH OR SERIOUS INJURY, REMOVE THE MAIN FUSE BEFORE PROCEEDING.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
 - Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn
454 County Road V V
Somerset, WI 54025-9031
Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



kuryakyn.com

STEP 2

Refer to **PIC 1**. Remove the two screws from each side of the inner fairing; set them aside for now, they will be reused. Repeat for the other side.

Have someone help hold the outer fairing and remove the three windshield screws; set them aside for now, the screws and windshield will be reused.

Carefully remove the outer fairing; unplug the headlight connector and set the outer fairing (HEADLIGHT FACING UP) on a soft, sturdy surface.

STEP 3




Refer to **PIC 2**. Remove the screw from the bottom of the existing headlight trim ring; save the screw, it will be reused.

STEP 4

Rotate the trim ring counterclockwise; pull it straight out and set it aside, it will not be reused.

STEP 5

Refer to **PIC 3**. Locate the Halo Trim and LED Halo Light.

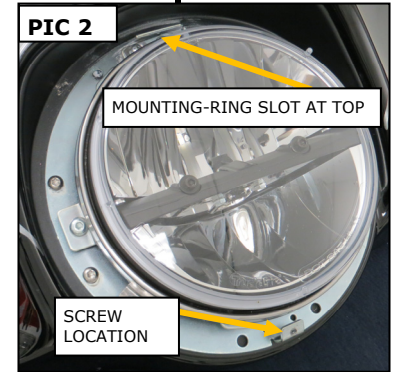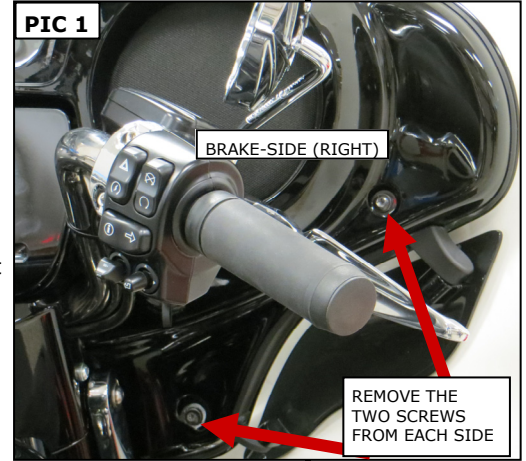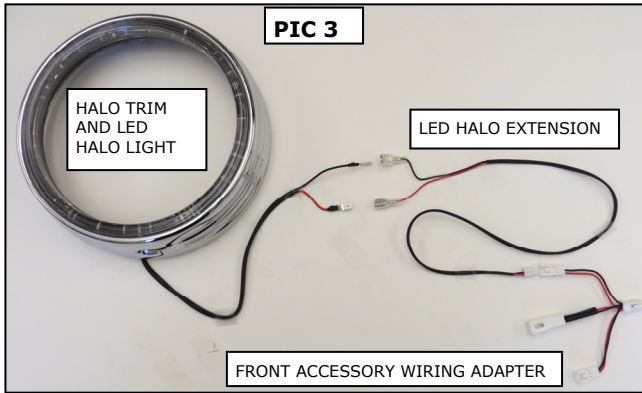

STEP 6

Refer to **PIC 4**. Route the Halo Light wires through the front side of the Trim; continue to route the wires through the opening under the headlight adjuster-ring as shown.


STEP 7

Refer to **PIC 5**. On the backside of the Chrome Halo Trim, locate the tab at the top;

align the tab with the mounting-ring slot (shown in **PIC 2**);

rotate the Halo Trim clockwise until the screw hole on the bottom aligns (do not install the screw yet);

Refer to **PIC 4**. Ensure that the wiring remains in the cut-out to avoid pinching.

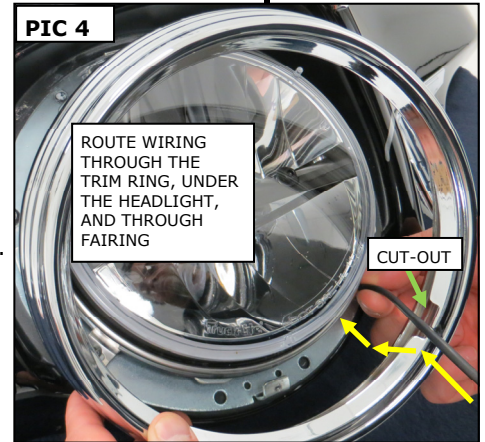

STEP 8

Test fit the LED Halo Light as shown in **PIC 6**; carefully pull the wiring through the backside of the fairing as you press the Light into place; ensure that the wiring does not get pinched or kinked.

NOTE:

Depending on how the headlight has been adjusted, you may need to GENTLY lift up or push down on the headlight to slip the Halo Light into place.



-cont.-

NOTICE

Ensure proper adhesion of this product. Remove all grease, oil, bugs, dirt, and other debris (including wax and polish) from the installation area. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation.

Do not attempt this installation in temperatures below 50°F (10°C). Proper adhesive bonding **ONLY** occurs above 50°F (10°C).

Kuryakyn®

STEP 9 Pull the Light out of the Trim;

on the backside of the Light, rub the adhesive backing with your finger nail to activate the adhesive; remove and discard the backing;

Ensure that the wiring remains in the cut-out (see **PIC 4** on **PAGE 2**;

press the Light into place for at least 60 seconds; full bonding will occur in 24 hours.

STEP 10 Secure the Trim with the screw removed in **STEP 3**. **DO NOT OVER TIGHTEN THE SCREW.**

NOTICE

Dielectric grease inhibits moisture and prevents corrosion. Kuryakyn recommends the use of the included dielectric grease on **ALL** electrical connections. Apply dielectric grease directly to **ALL** mating surfaces.

NOTE: Have someone help hold the assembled fairing while connections are being made and lights tested.

STEP 11 Refer to **PIC 7**. Locate the LED Halo Extension;

apply some of the included Dielectric Grease to the open ends of the spade connectors and connect the Extension wires to the Light wires, **RED** to **RED** and **BLACK** to **BLACK**.

STEP 12 Refer to **PIC 7** and **8**. Locate the included Front Accessory Wiring Adapter;

on the bike, locate the **2-pin accessory connector** on upper corner of the brake-side (right) inner fairing (see **PIC 8**);

apply Dielectric Grease to the open ends of the connectors and connect the **2-pin Adapter connector** to the **2-pin accessory connector**.

STEP 13 Apply Dielectric Grease to the 3-pin Extension connector and connect it to the 3-pin connector on the Front Accessory Wiring Adapter.

STEP 14 Reinstall the main fuse and reconnect the headlight;

turn the **IGN ON**;

test for proper function of the lights. The Halo Light will illuminate with the key turned to **ON** and **ACC**.

Turn **IGN OFF**.

STEP 15 Secure the outer fairing and windshield (using the screws removed in **STEP 2**) in the reverse order they were removed.

WARNING

VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY. ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE.



NOTICE

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

Ride On!

CHROME LED HALO TRIM RING, 7" for '14-UP

INSTALLATION

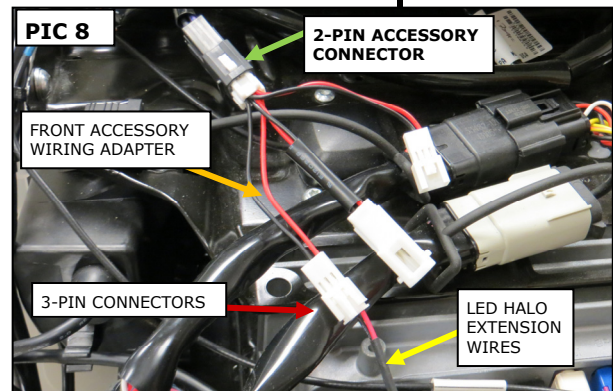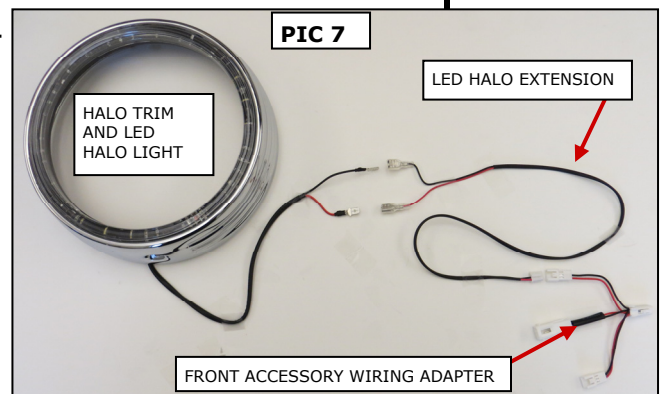

**PAGE
3**