

Simply breathtaking!



## » Variable capacity tank F01 / F02

Speidel's variable capacity tanks always adapt to the amount of liquid they contain. The floating lid ensures that no air comes in. This way oxidation stands no chance.

Our popular variable capacity tanks have been established and proven in many ways. Like all Speidel tanks they are top-quality. They can be used as storage tanks or fermentation tanks.

Access of air not permitted!  
Floating lid that works as seal.  
The air stays out.

### APPLICATION RANGE

- |                |           |
|----------------|-----------|
| › Storage      | Ideal for |
| › Maturation   | › Juice   |
| › Fermentation | › Must    |
|                | › Wine    |



**STANDARD EQUIPMENT VARIABLE CAPACITY TANK F01/F02**

- › AISI304 stainless steel, surface III d (2R), marbled outside
- › Tank open on top with strengthening rim
- › Vaulted tank bottom
- › External litres scale
- › Standing on three legs

**WIDTH OF RIM**

- › Up to 300 litres capacity = approx. 17 mm
- › From 530 litres capacity = approx. 42 mm

**RACKING OUTLET F01**

- › Up to tank- $\varnothing$  of 550 mm internal thread 3/4" (BSP) with plastic blank bung
- › From tank- $\varnothing$  of 630 mm external thread G 1" (BSP) with plastic blank bung

**BOTTOM OUTLET F01**

- › Up to tank- $\varnothing$  of 550 mm bottom outlet neck internal thread G 3/4" (BSP) with plastic blank bung
- › From tank- $\varnothing$  of 630 mm bottom outlet neck external thread G1" (BSP) with plastic blank bung


**RACKING OUTLET F02**

- › Plain surface with drilled hole  $\varnothing$  48 mm (to hold flap valve Gr. 37 or weld-on thread NW40, NW50 DIN 11851)
- › In case of  $\varnothing$  630 mm reinforcement moulded out of the tank's casing
- › In case of  $\varnothing$  820 mm with welded-on reinforcing plate

**BOTTOM OUTLET F02**

- › Bottom outlet neck with external thread NW40 DIN 11851

**DIMENSIONS OF VARIABLE CAPACITY TANK F01/F02**

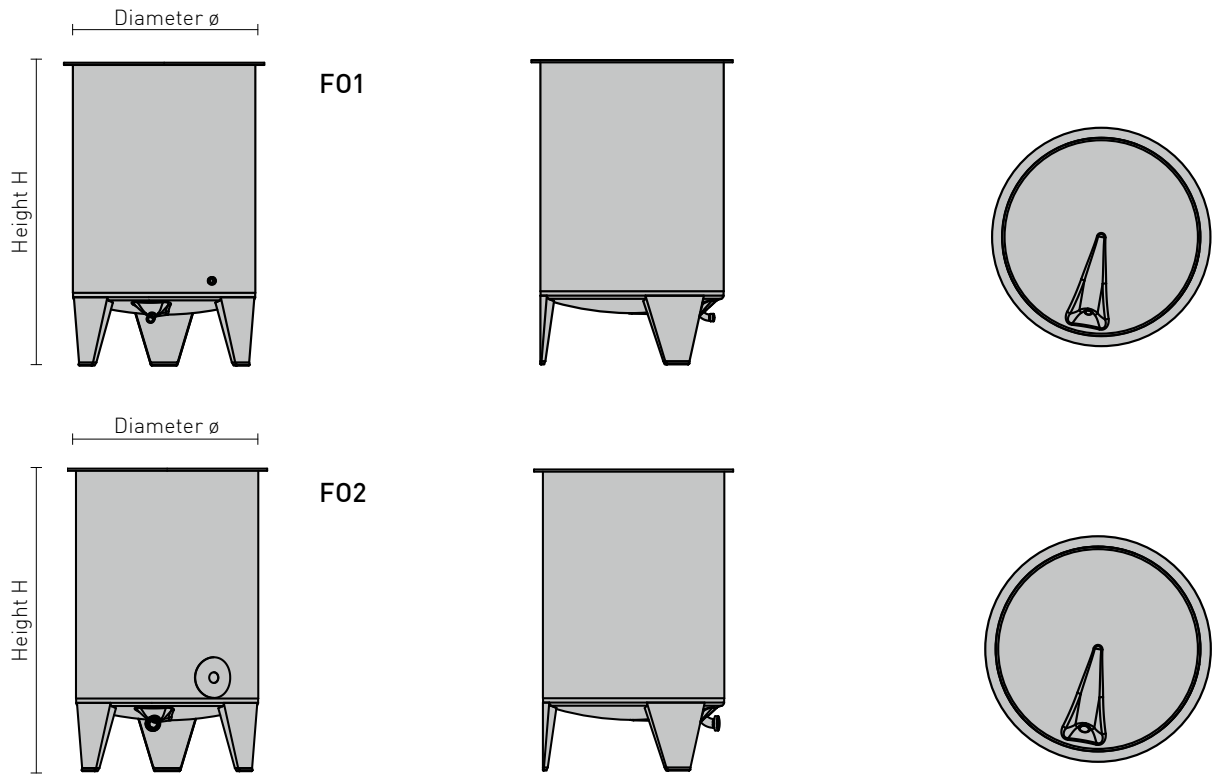

Capacity litres	H mm	$\varnothing$ mm	Order No. F01	$\varnothing$ mm	Order No. F02
220	1,382	550	F01-055-220	-	-
300	1,384	630	F01-063-300	630	F02-063-300
530	1,361	820	F01-082-530	820	F02-082-530
675	1,620	820	F01-082-675	820	F02-082-675
910	2,109	820	F01-082-910	820	F02-082-910