

MPE Degreasing


A powerful degreaser

Area of use:

An effective degreaser that dissolves coatings from asphalt splashes, tar and road salt. Effectively cleans trucks, cars, buses, forklifts, vans, tankers, construction machinery, cars, industrial cleaning, etc.

How to use:

- Degreaser must be used on a dry surface.
 - Always apply MPE Degreaser from the bottom up.
 - Allow the product to work, but do not let it dry. (If it starts to dry, spray on more before rinsing.)
 - Always wash the vehicle with MPE Super Wash after degreasing.
- Shake before use.

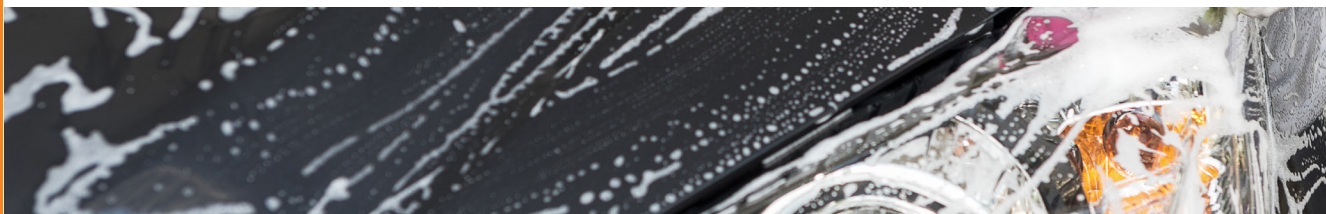

Packaging: 25 liter can or 200 liter barrel

Storage: Frost-free in original packaging

Dosage: Concentrate

ADR: Not classified as dangerous goods for road or rail transport.

Protective equipment:

Observe occupational exposure limits and minimize the risk of inhalation. Wear tight-fitting goggles or face shield. Protective gloves should be used if there is a risk of direct contact or splash. Butyl rubber. Nitrile. Value: 4 - 8 hour(s). Reference to relevant standard: EN 374 / III. Wear appropriate clothing to prevent any possibility of skin contact. When spraying: Gas mask with organic vapour canister and dust and mist filter. Mask type: Use respiratory equipment with gas filter, type A2.

There must be access to quick and abundant eyewash in connection with the workplace.
For further information and description of first aid measures see specific safety data sheet.



Signal word: Danger

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result.
If in doubt, contact MPE International for advice.