

MPE Foam Wash

High-foaming vehicle cleaning

Area of use:

Used as pre-degreasing during summer and winter washing in automatic car washes. Effectively dissolves oil, road dust, traffic film, insects, grease and salt.

Suitable for high-pressure, brush and automatic washing.

A product for those who want a quick and effective result..


How to use:

When using in an automatic vehicle wash - follow the machine's instructions.

Never apply the product to hot surfaces and do not let the product dry. Be careful on repainted and sensitive materials.

Use a foam lance or chemical applicator.

Allow the product to act for 1-5 minutes depending on the degree of soiling and outside temperature. Shake before use.

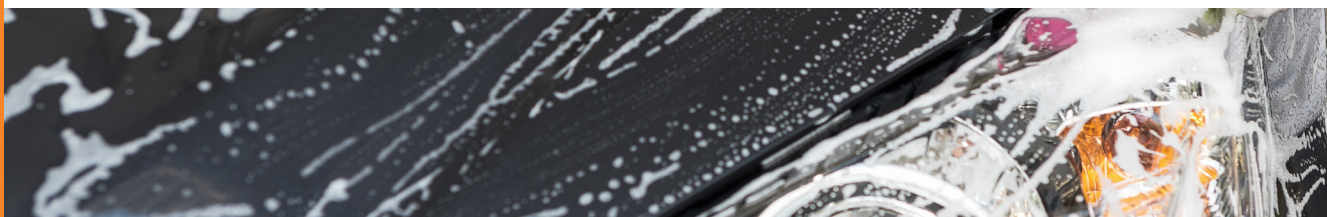

Packaging: 25 liter can or 200 liter barrel

Storage: Frost-free in original packaging

pH-value: ~ 11,9

Dosage: Used in concentrations 3 – 15% solutions.

ADR: Not classified as dangerous goods for road or rail transport.

Protective equipment:

Provide adequate ventilation. Wear tight-fitting goggles or face shield. Protective gloves are recommended. Butyl rubber. Nitrile. Value: 4 ~ 8 hour(s) Reference to relevant standard: EN 374/III. Wear appropriate clothing to prevent any possibility of skin contact. When spraying: Gas mask with organic vapour canister and dust and mist filter.

There must be access to quick and abundant eyewash in connection with the workplace. For further information and description of first aid measures see specific safety data sheet.



Signal word: Danger

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.