

MPE INTERNATIONAL®

- for a cleaner world -

MPE Graffiti Remover Power Gel

Efficient gel graffiti remover


Range of application:

The all-round graffiti remover that dissolves markers and sprays. Effective gel alkaline graffiti remover for porous and non-porous surfaces that works all year round.

How to use:

On non-absorbent surfaces, application is done with a cloth or brush. Work with a sponge or brush until the graffiti is dissolved, wipe away the dissolved graffiti with a clean cloth or rinse with water if possible.

On absorbent surfaces, the product is applied with a brush or roller. Let the product work for about 10-30 minutes, or longer if necessary. Wash down the dissolved graffiti with suitable pressure and temperature according to the nature of the surface. Usually, you rinse at 90°C and approx. 90 -150 bar pressure.

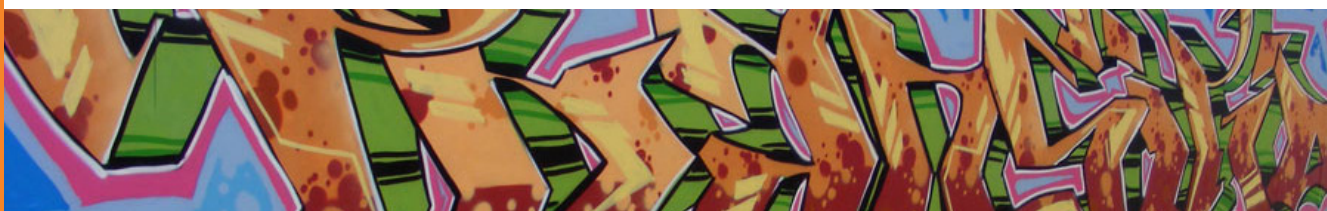

Containers: 10 or 25 litre, can

Storage: Frost-free in original packing

Dosage: Concentrate

pH value: 14

Consumption: Approx. 0,1-0,3 litre/m²

ADR: UN 2920 CORROSIVE LIQUID, FLAMMABLE, N.O.S. (Caustic potash ; Solvent naphtha (petroleum), light arom.), 8(3), II, D/E



Precautions:

Wear tight-fitting goggles or face shield. Wear protective gloves, Butyl rubber or Nitrile. Value: 4 - 8 hour(s) Reference to relevant standard: EN 374 / III. Wear appropriate clothing to prevent any possibility of skin contact. Wear respiratory protection with combination filter (dust and gas filter) during spraying operations.

Eye wash facilities and emergency shower must be available when handling this product. For more information please see the Safety Data Sheet for this particular product.



Signal word: Danger

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.

MPE International AB
Dalagatan 3B
S-803 10 Gävle, Sweden

Phone:
+46(0)8-522 99 440

Email:
info@mpei.se

Web:
www.mpei.se

Org.nr:
556722-0420