

OFF Ask

Graffiti protection

Approved by Byggarbetsnämningen, Sunda Hus, Chemsoft and Trafikverket


Range of application:

OFF Ask, wax based diffusion-open graffiti protection, which is very effective against graffiti. OFF Ask is approved according to AMA 10.

How to use:

Dirty surfaces should be cleaned before application, for example, with BCS Amor. Apply OFF Ask with a roller, a low pressure spray or a paint sprayer. Depending on the porosity of the surface, 2-3 layers of graffiti protection may be required. Apply until the surface is saturated, the graffiti protection must be surface dry before subsequent coats are applied. Always apply to a test area to detect any colour differences. Clean the sprayer with water following application.

If the underlying surface withstands high pressure and hot water, remove the graffiti at 80-90°C and 120-200 bar. In difficult to clean cases and sensitive surfaces, OFF Iris can be applied and let sit for 5 minutes, then washed with appropriate pressure and temperature.

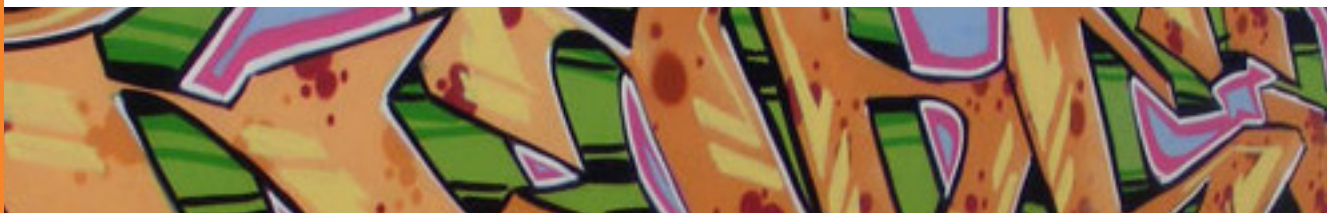

Containers: 5 or 25 litre, can

Storage: Frost-free in original packing

Dosage: Concentrate

pH value: Neutral

Consumption: Approx. 0,1-0,4 litre/m²

ADR: Not classified as dangerous goods for use by road or rail transportation

Precautions:

Ensure good ventilation. Irritates eyes and skin.

Use protective clothing, gloves and glasses or visor in risk of contact

Eye wash facilities and emergency shower must be available when handling this product.

For more information please see the Safety Data Sheet for this particular product.

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.

MPE International AB
Dalagatan 3B
S-803 10 Gävle, Sweden

Phone:
+46(0)8-522 99 440

Email:
info@mpei.se

Web:
www.mpei.se

Org.nr:
556722-0420