

OFF Oden

Gel graffiti remover


Approved by Byggsvarubedömningen, Sunda Hus, Chemsoft and Trafikverket

Range of application:

For porous and non-porous surfaces.

How to use:

Apply with a brush, roller or high-pressure spray and agitate the graffiti with a brush. Allow to take effect for approx. 10-30 min, allow longer if the layers of paint are thick or in cold and damp weather. Always adjust the water temperature and pressure to the type of surface. Normally a rinsing temperature/pressure of 90°C / 90-150 bar is sufficient. For the remaining shadows, apply OFF Tor or OFF Munin if the surface can withstand this, and then rinse off.

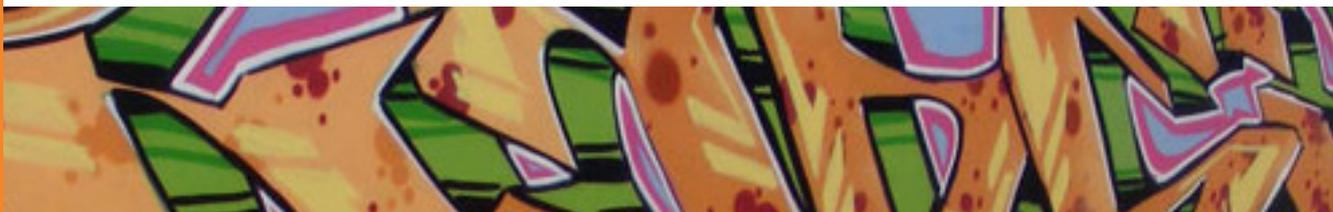

Containers: 10 or 25 litre, can

Storage: Frost-free in original packing

Dosage: Concentrate

pH value: 11 < 11,5

Consumption: Approx. 0,3-1,0 litre/m²

ADR: Not classified as dangerous goods if transported by road or by rail

Precautions:

Use protective gloves made of butyl or nitrile rubber.

Ensure good ventilation, avoid inhalation of dust.

Use protecting clothing, gloves, visor or glasses in case of contact.

Eye wash facilities and emergency shower must be available when handling this product.

For more information please see the Safety Data Sheet for this particular product.



Signal word: Warning

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.

MPE International AB
Dalagatan 3B
S-803 10 Gävle, Sweden

Phone:
+46(0)8-522 99 440

Email:
info@mpei.se

Web:
www.mpei.se

Org.nr:
556722-0420