

OFF Sol

One component permanent graffiti protection


Approved by Bygghälsöversynen, Sunda Hus, Chemsoft and Trafikverket

Range of application:

OFF SOL is based on high-quality water-borne silanes and siloxanes, which effectively prevents spray and indian ink paints from penetrating the surface. OFF Sol is used as permanent graffiti protection on mineral surfaces such as: brick, concrete, limestone, sandstone, natural stone (granite/marble), terrazzo, mineral-based plastered surfaces. OFF Sol is a diffusion-open graffiti protection that does not need to be re-applied following sanitation. Depending on the colour of the graffiti and the graffiti remover used, surfaces can be cleaned up to approx. 10 times before further protection is required.

How to use:

Apply with a low-pressure spray starting from the bottom going up until the surface is saturated. Use a soft brush or cloth if you need to remove excess product. Clean equipment with water after use. Use OFF Poseidon or OFF Graffiti remover 2 to remove graffiti on area protected with OFF Sol.

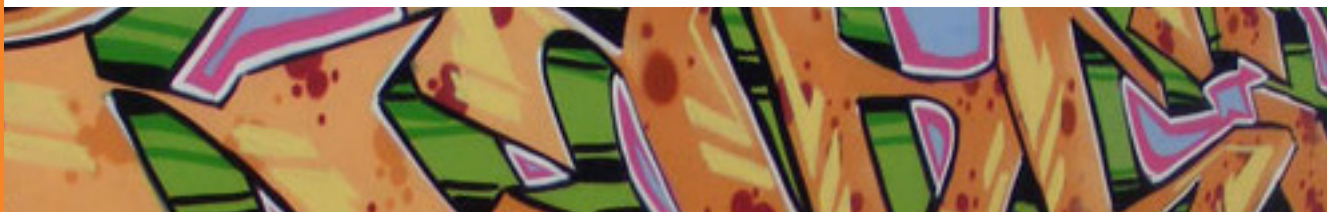

Containers: 5 or 25 litre, can

Storage: Frost-free in original packing

Dosage: Concentrate

pH value: Neutral

Consumption: Approx. 0,2-0,4 litre/m²

ADR: Not classified as dangerous goods if transported by road or by rail

Precautions:

Use protective clothing, gloves and glasses or visor.

Ensure good ventilation. Repeated skin contact may give dry skin and skin crackings.

Eye wash facilities and emergency shower must be available when handling this product.

For more information please see the Safety Data Sheet for this particular product.

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result.
If in doubt, contact MPE International for advice.