

OFF Tyr Tunn

Shadow remover

Approved by Bygghälsöversynen, Sunda Hus, Chemsoft and Trafikverket


Range of application:

OFF Tyr Tunn is a liquid product used for bleaching remaining shadows.

NOTE! OFF Tyr may not be used on aluminum, copper, zinc or galvanized surfaces. Always try out first to ensure the surface can withstand OFF Tyr.

How to use:

Apply OFF Tyr Tunn with a brush on the surface to be cleaned. Cover surfaces that are not to be cleaned. Apply 0.1-0.3 l/m², allow to take effect 0.5 – 12 hours. Rinse with lukewarm water.

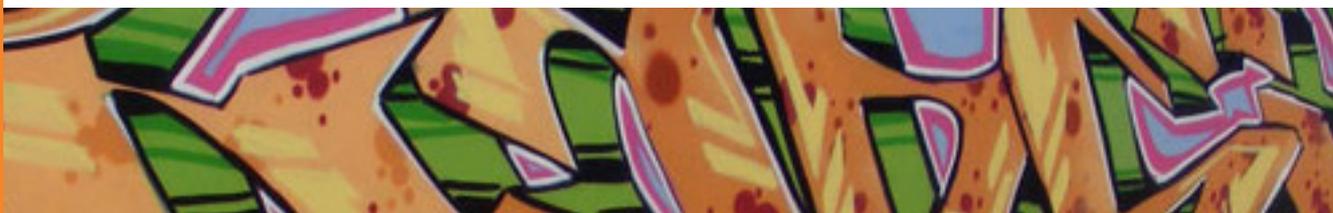

Containers: 5 or 25 litre, can

Storage: Frost-free in original packing

Dosage: Concentrate

pH value: 11,5

Consumption: Approx. 0,1-0,3 litre/m²

ADR: UN 1791 HYPOCHLORITE SOLUTION, 8, III

Precautions:

Use protective gloves made of butyl or nitrile rubber.

Ensure good ventilation, avoid inhalation of dust.

Use protecting clothing, gloves, visor or glasses in case of contact.

Eye wash facilities and emergency shower must be available when handling this product.

For more information please see the Safety Data Sheet for this particular product.



Signal word: Danger

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.