

OFF Zeus

Permanent 1-component dirt and graffiti protection

Range of application:

OFF Zeus is our new permanent 1-component graffiti and dirt protection, for surfaces that don't need to breathe. OFF Zeus is a permanent protection that provides a transparent gloss coating. The surface will be protected against graffiti and other soiling. The protection becomes a barrier to the material, which causes graffiti and dirt not to adhere to the surface. This makes it easy to remove any graffiti and dirt with mild products.

Can be used on:

- Painted sheet
- Car washes, as dirt protection
- Signs
- Trash cans
- Elevators
- Vehicles, buses and trains
- Glazed surfaces
- Stainless steel and aluminum

Good to know:

- Stops marker and spray graffiti
- Effective graffiti protection for shiny surfaces
- Provides a more cost-effective and more efficient graffiti removal with better quality
- Permanent graffiti protection
- Can be used as a shine enhancer
- Also provides dirt protection
- Only for surfaces that don't breathe



How to use:

Clean the surface thoroughly from graffiti, dirt and greasy particles. The surface must be dry before OFF Zeus is applied.

Application and surface temperature should be between +5 and +30°C.

The relative humidity should not exceed 75%. Do not apply in direct sunlight and ensure that it does not rain on the surface within 24 hours after application.

Apply OFF Zeus with sponge, cloth or a paint sprayer. Apply a thin layer. In case of a surface that is matte or that absorb, a thicker layer should be added.

It is dust dry after about 2 hours. For full resistance to graffiti, approximately 5 days of hardening is required, but it gives protection against graffiti after 1 day.

If OFF Zeus is to be applied on a painted surface, make sure the paint has fully hardened before application.

Graffiti removal off OFF Zeus:

When removing graffiti, use a mild graffiti remover such as OFF Ymer or OFF Iris.

In case of minor graffiti removal, you can use a cloth or brush, rinse with water.

On larger surfaces, use high pressure washing, but adjusted pressure, however, max 100 bar and about 50°C. Always work from the bottom up.

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.

Containers: 1,2 liter in aluminum packaging

Storage: Frost-free in original packing

Dosage: Concentrate

Durability: Approx. 1 year in unopened packaging


Consumption: Approx. 1 litre for about 60-90m² of hard, shiny, non-porous surfaces

ADR: UN 2924 FLAMMABLE LIQUID, CORROSIVE, N.O.S. 3 (8), II, D/E

Precautions:

Use engineering controls to reduce air contamination to permissible exposure level. Wear tight-fitting goggles or face shield. Use full length gloves, butyl rubber or nitrile. Wear appropriate clothing to prevent reasonably probable skin contact. In case of inadequate ventilation use suitable respirator. Use respiratory equipment with gas filter, type A2. When spraying: Use respiratory equipment with combination filter, type A2/P2. Respiratory protection must be used if air contamination exceeds acceptable level. In case of inadequate ventilation or risk of inhalation of oil mist, suitable respiratory equipment with combination filter (type A2/P3) can be used. Wash at the end of each work shift and before eating, smoking and using the toilet.

Provide eyewash, quick drench. An eye wash bottle must be available at the work site. For more information please see the Safety Data Sheet for this particular product.

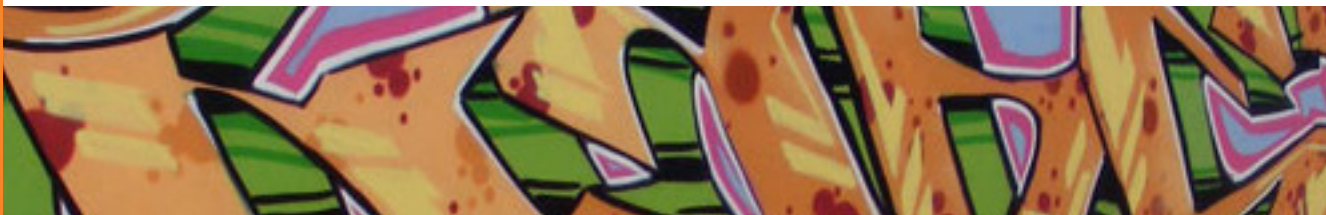

Signal word: Danger

This product information is intended only as a guideline. MPE International does not accept responsibility for the end result. If in doubt, contact MPE International for advice.

MPE International AB
Dalagatan 3B
S-803 10 Gävle, Sweden

Phone:
+46(0)8-522 99 440

Email:
info@mpei.se

Web:
mpei.se/en

Org.nr:
556722-0420