


Model: H100030H-P

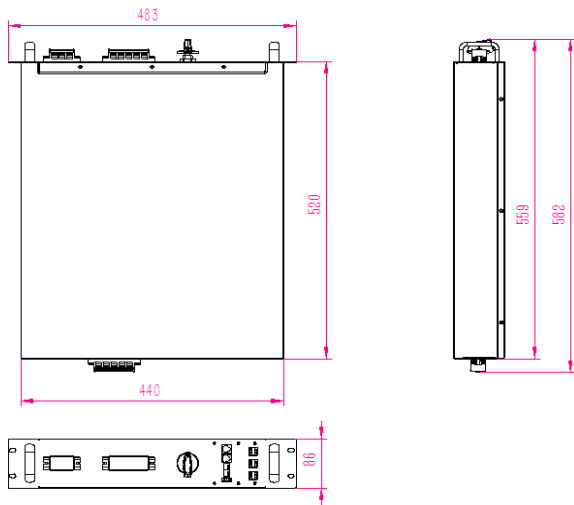

NO.	Item	Specification parameter	Note
1	Input voltage range	H100030H-P01: 250~1000V/ H100030H-P02: 0~1000V	
2	Max output current	30A	
3	Communication mode	CAN/RS485	
4	Heat-dissipating method	Natural cooling dissipation	
5	Protection level	IP20	
6	Environment Temperature	-20°C~60°C	
7	Environment Humidity	10%~80%RH	
8	Reference standard	IEC61000	
9	Protection function	Insulation monitoring, precharge function, short circuit protection, charge and discharge protection	
10	Insulation resistance	DC output to case: 2MΩ, 1000VDC	
11	Withstand voltage	DC output to case: 2000VAC, 10mA, 10s	
12	Dimensions W×H×D	440mm× 86mm× 520mm	Does not include handle size
13	Weight	10kg	