

Technical Sheet - ALH6 Lever Hoist


Key Features

- **Heavy-Duty Safety Latches:** Top and bottom hooks feature reinforced cast-steel latches for a secure, positive hook closure.
- **Overload & Traceability Markings:** Each hook is clearly marked with overload indicators and identification codes for full compliance and easy inspection.
- **Full Inspection Access:** Hook housings are fastened with bolt-and-nut assemblies, enabling thorough inspection when required.
- **Cross-Hauling Capability:** Suitable for fleeting applications up to 60deg from the vertical, without reducing the working load limit.
- **Load Chain:** Fitted with G80 alloy steel load chain fully compliant with EN818-7 and a Zinc finish for enhanced corrosion protection.
- **Optional Enhancements:** Overload limiter, ball-bearing hooks, and adaptor fitting to enable a range of attachment options.
- **Temperature Range:** -20°C to +120°C
- **Light Load:** 2% WLL
- **Safety Factor:** 4:1
- **Proof Load Testing:** 1.5 x WLL
- **Standards**
 - British Standard BS EN13157:2004 + A1:2009
 - American Standard ASME B30.16-2014
 - Australian Standard AS1418.2-1997
 - South African Standard SANS 1594:2007
 - NORSOK R-002: 2017.



Technical Sheet - ALH6 Lever Hoist

Data Table

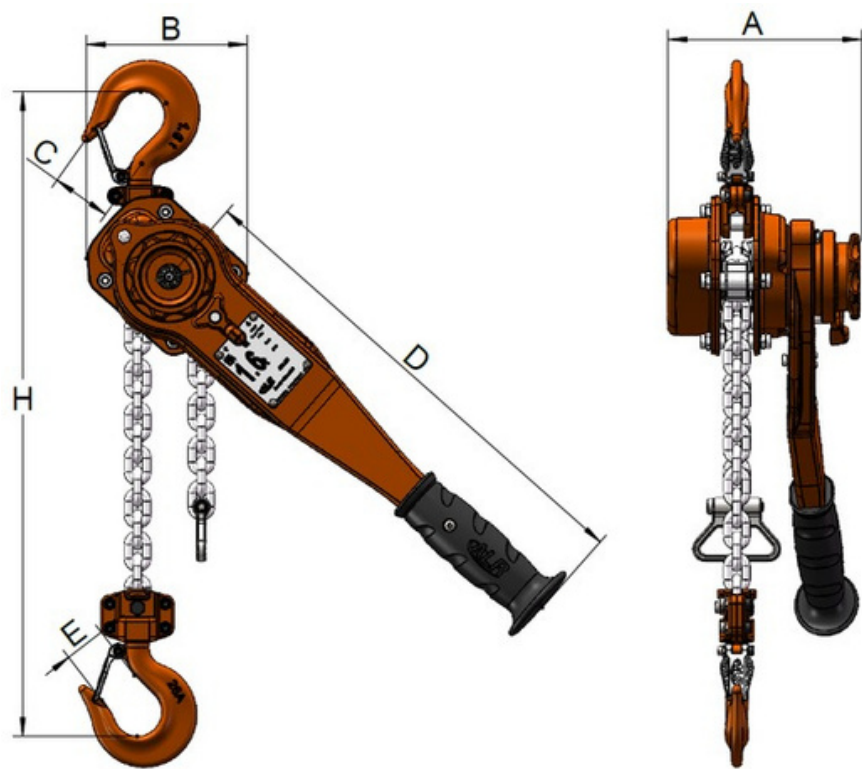

Capacity (t)	0.8	1.0	1.6	3.2	6.3	9.0	15.0
Product Code	ALH6-008	ALH6-010	ALH6-016	ALH6-032	ALH6-063	ALH6-090	ALH6-150
No. Falls	1	1	1	1	2	3	6
Load Chain (mm)	5.6 x 17	5.6 x 17	7.1 x 21	10 x 30	10 x 30	10 x 30	10 x 30
Mass @ 1.5m							
HOL (kg)	6	6	10	16	27	39	95
Extra mass per m HOL (kg)							
A (mm)	0.7	0.7	1.1	2.17	4.34	6.5	13
B (mm)	121	121	141	210	228	314	415
C (mm)	148	148	166	168	168	168	168
D (mm)	24	28	32	38	48	59	77
E (mm)	265	265	358	415	415	415	415
H (mm)	15	15	19	25	32	42	51
	300	320	360	445	570	670	1000