


**Gyldighed / Giltighet / Validity / Gültigkeit**

Produktidentifikation / Products identification / Kenncode / Identifikationskod:

VG1425C, VG1425S

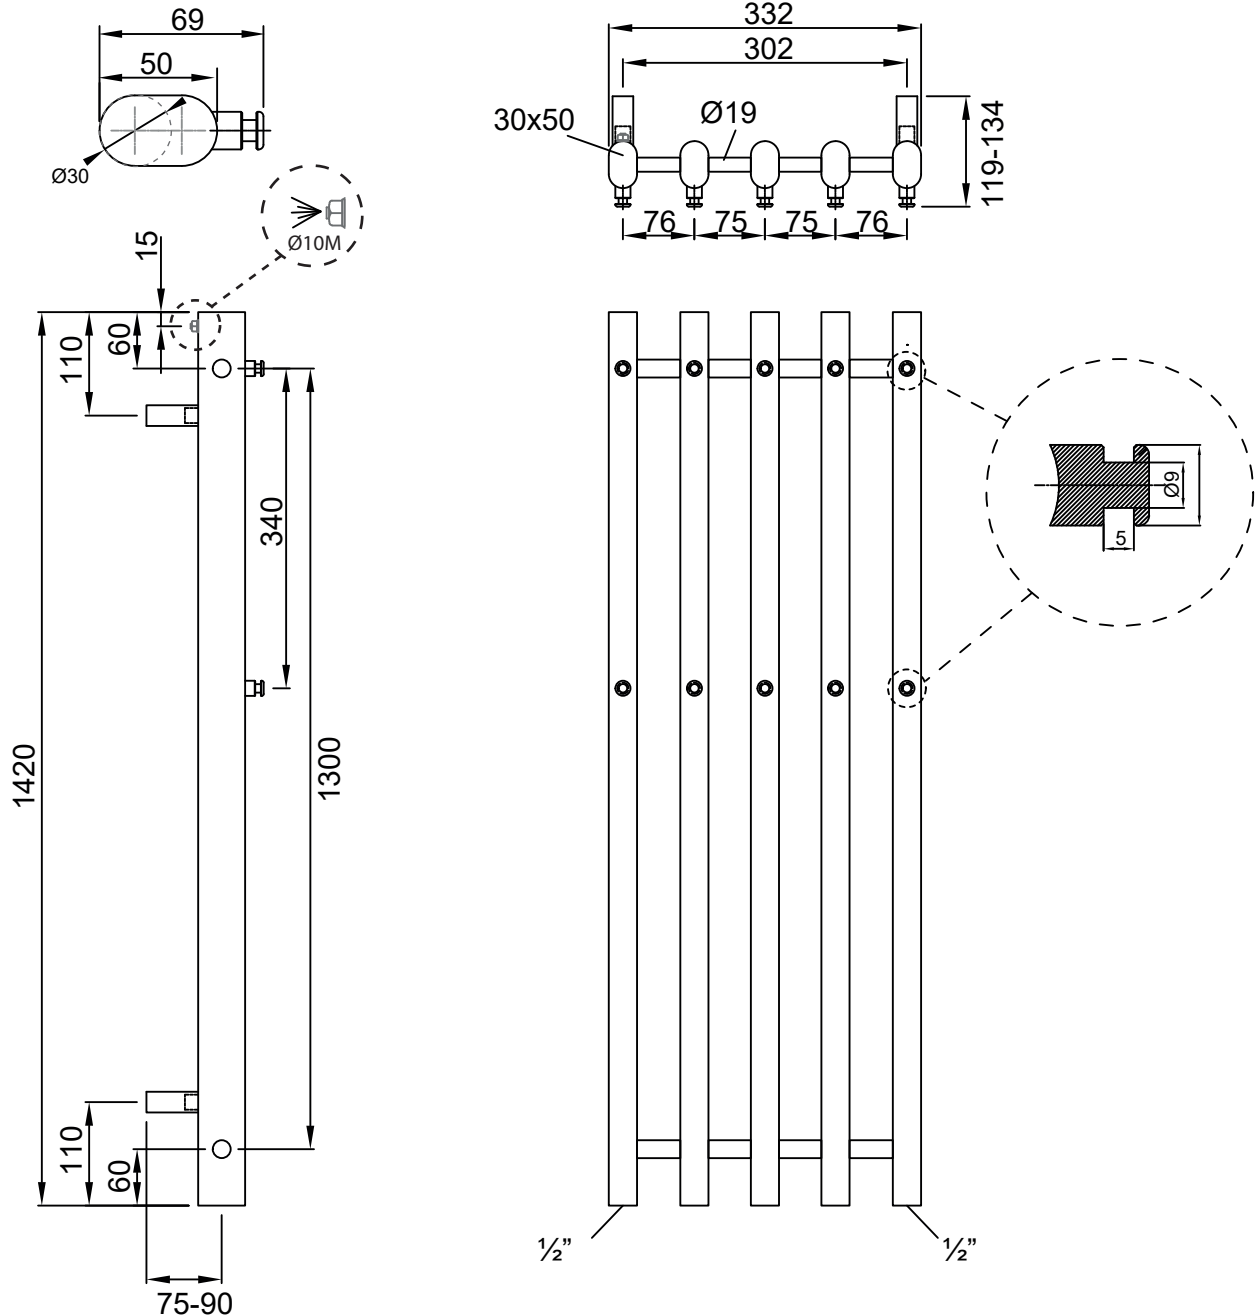

**Ydeevnedeklaration / Declaration of Performance / Leistungserklärung / Prestandadeklaration:**

Plan/flat/flach & krom/chrome/verchromt: DOP-VGC-001  
 Plan/flat/flach & lak/paint/lack: DOP-VGS-001



Byggevareforordningen nr. 305/2011 af 9. marts 2011  
 Regulation (EU) No 305/2011 of 9 March 2011  
 Verordnung (EU) Nr. 305/2011 von 9. März 2011  
 Fördordning (EU) nr 305/2011 av den 9 mars 2011



Ikke til brugsvand!  
 Not for open systems!  
 Nicht für offene Wasser-System  
 Inte för VVC/tapp vatten!



Max 90° Celcius



Max 8 BAR



2 x 1/2"

## Ydeevne / Performance / Leistung / Prestanda

Produktidentifikation / Products identification / Kenncode / Identifikationskod:

VG1422C, VG1422S, VG1424C, VG1424S, VG1424H, VG1425C, VG1425S

### Ydeevnedeklaration / Declaration of Performance / Leistungserklärung / Prestandadeklaration:

Plan/flat/flach & krom/chrome/verchromt: DOP-VGC-001

Plan/flat/flach & lak/paint/lack: DOP-VGS-001

| Produktidentifikation<br>Products identification<br>Kenncode<br>Identifikationskod |    | Nominel termisk effekt<br>Rated thermal output<br>Nennwärmeleistung<br>Nominell värmeeffekt |           | $\Phi = K * (\Delta T/50)^n$ |      |
|--|----|---|-----------|------------------------------|------|
|  |    | Delta 30:   | Delta 50: | K                            | n    |
| VG1422S  | => | 129   | 240       | 240                          | 1,21 |
| VG1424S  | => | 239   | 445       | 444                          | 1,21 |
| VG1425S  | => | 288   | 534       | 535                          | 1,21 |
| VG1422C  | => | 87,7  | 165       | 166                          | 1,25 |
| VG1424C  | => | 167   | 299       | 299                          | 1,24 |
| VG1425C  | => | 189   | 354       | 354                          | 1,23 |



Byggevareforordningen nr. 305/2011 af 9. marts 2011  
Regulation (EU) No 305/2011 of 9 March 2011  
Verordnung (EU) Nr. 305/2011 von 9. März 2011  
Förordning (EU) nr 305/2011 av den 9 mars 2011



Ikke til brugsvand!  
Not for open systems!  
Nicht für offene Wasser-System  
Inte för VVC/tapp vatten!



Max 90° Celcius




Max 8 BAR



2 x 1/2"

## Montering / Mounting / Montage

VG1422C, VG1422S, VG1424C, VG1424S, VG1424H, VG1425C, VG1425S

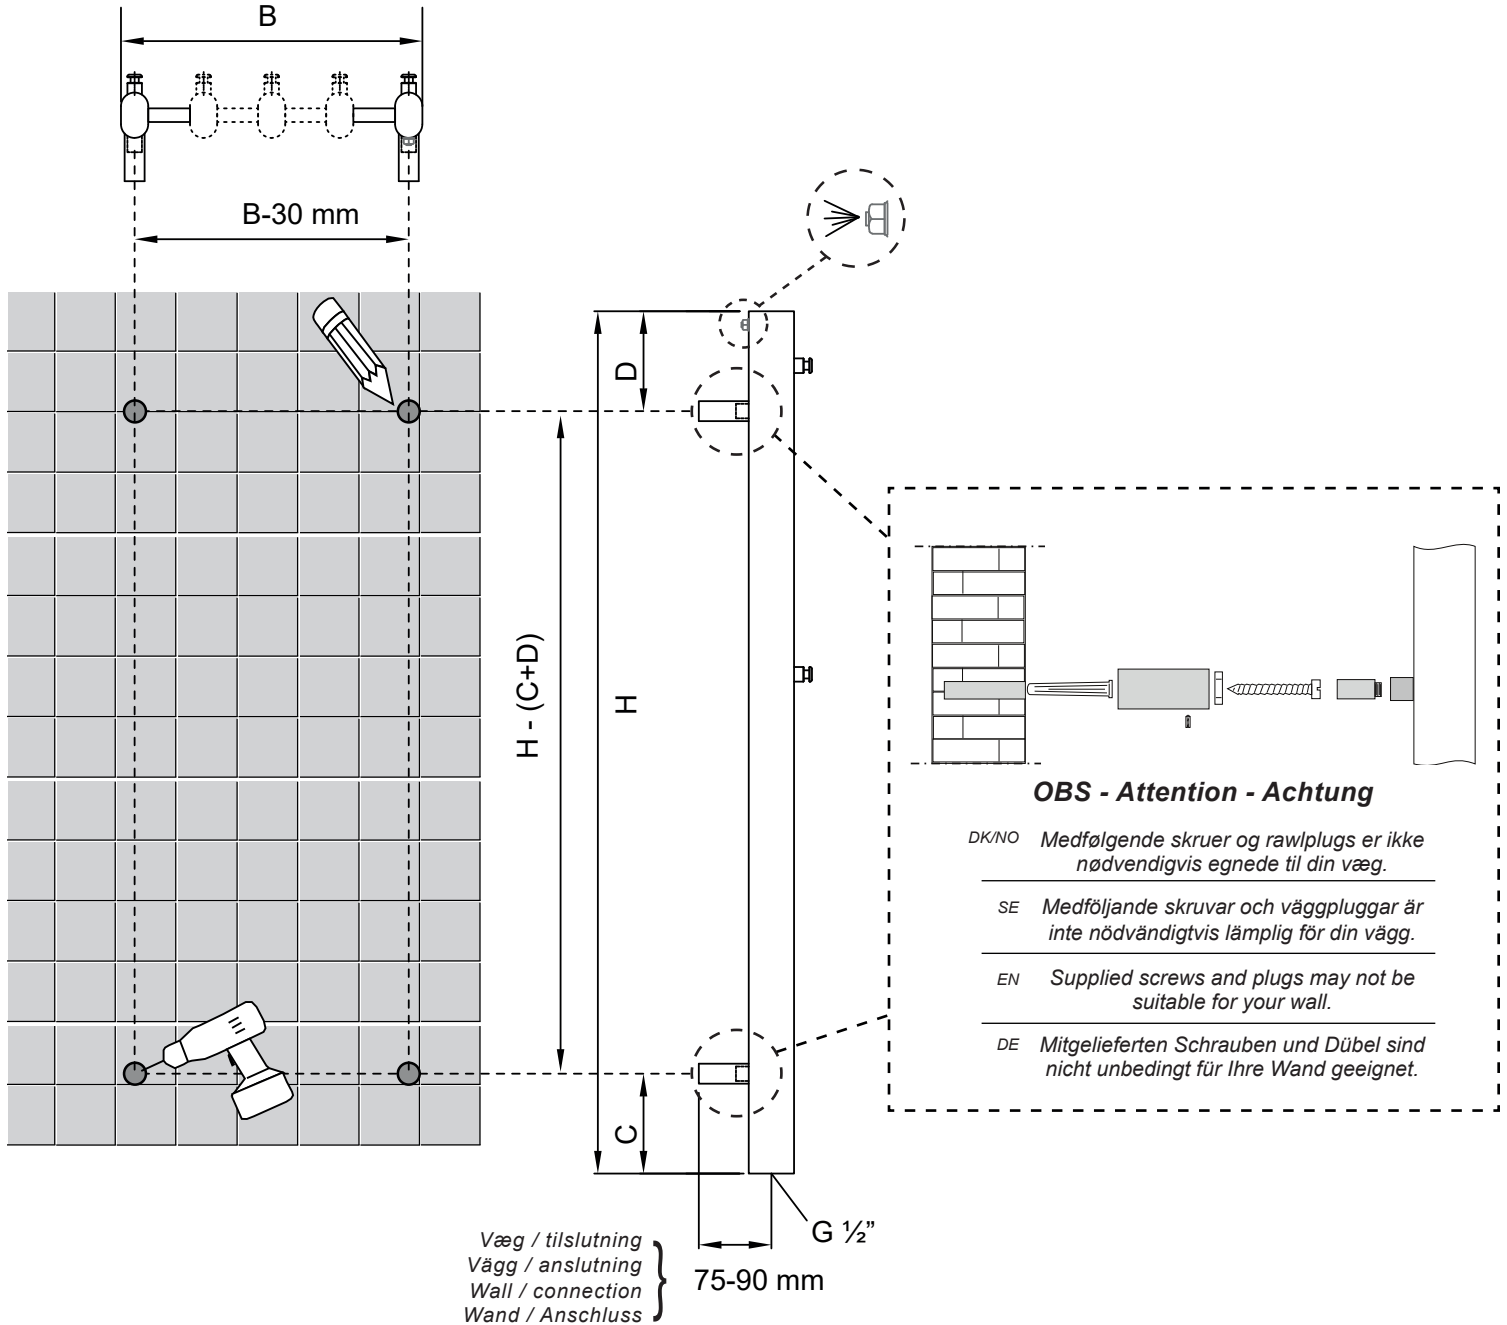

Byggevareforordningen nr. 305/2011 af 9. marts 2011  
Regulation (EU) No 305/2011 of 9 March 2011  
Verordnung (EU) Nr. 305/2011 von 9. März 2011  
Förordning (EU) nr 305/2011 av den 9 mars 2011



Ikke til brugsvand!  
Not for open systems!  
Nicht für offene Wasser-System  
Inte för VVC/tapp vatten!



Max 90° Celcius



Max 8 BAR



2 x 1/2"