




VIEW TO CONNECTOR

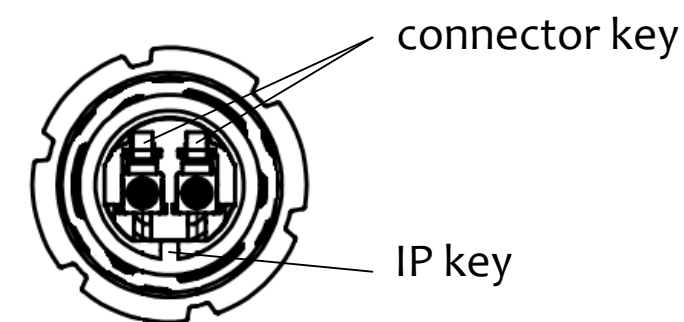

ORDERING CODE

R02X-EEX-xxx

- xxx cable length [050 = 50m, 001 = 1m]
- S - Straight , C - Cross
- E IP LCD, F IP LCD APC
- E IP LCD, F IP LCD APC
- 9 OS2, 3 OM3, 4 OM4
- 02 2F

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - CUMULATIVE TEST REPORT OF MEASURED IL AND RL VALUES SENT ON DEMAND IN ELECTRONIC FORM
- 3 - OM3, OM4, - IL<0.25dB , RL>30dB , 850nm & 1300nm
OS2 - IL<0.25dB, LC/UPC - RL>50dB, 1310nm & 1550nm
LC/APC - RL>60dB, 1310nm & 1550nm

IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 4 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35.
END FACE GEOMETRY ACCORDING TO TELCORDIA GR-326
- 5 - ASSEMBLY WITH LENGTH BELOW 50MTRS PACKED IN SEALED PE BAG,
BULK PACK IN OUTER CARDBOARD BOX.
LONGER ASSEMBLY THEN 50MTRS COILED ON CARDBOARD REEL,

REVISION-DATE: A - 22.10.2021	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2021/10/22	TITLE: 2f LCD IP - LCD IP PATCH CORD		
New drawing		CHECKED BY, DATE: L.Miskerik			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: Matus/Smelh.	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	PRODUCT NUMBER: R02X-XXX-xxx	DRAWING NUMBER: 1-W-8697_1_A	SHEET NO. 1 of 1	
		A	F-rack		SIZE A3