

# ATP-200

Apartment amplifiers

Apartment amplifier for VHF and UHF signals. Reliable, cold and small size.

It has 2 outputs.



High Efficiency Cold technology



Adaptable to standard record boxes



Gain adjustment





One TV input





2 RF outputs

## Application examples

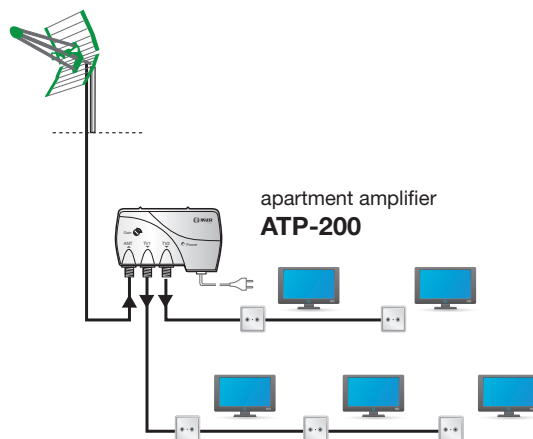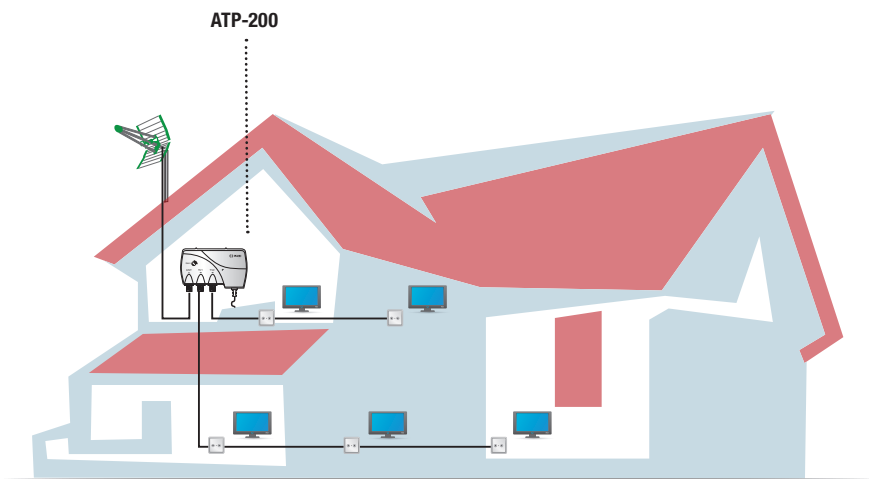



Graph of gain control

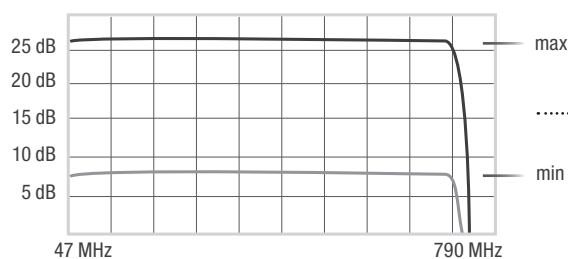

## Features

Model	ATP-200	
Ref.	3434	
No. of RF outputs	2	
Frequency range	MHz	47 - 790
Gain	dB	> 25
Gain adjustment	dB	> 15
Output level (IM3 -60dB, DIN 45004B)	dBμV	(2x) > 103
Noise figure	dB	< 4
Mains supply voltage (50/60 Hz)	VAC	230 - 240
Max consumption	W	1.5
Dimensions	mm	90 x 58 x 27

- TV amplifier.
- 1 RF input — 2 RF outputs.
- Gain with adjustment potentiometer.
- Mains powered, 50/60 Hz. Electrical safety protection level: Clase II. Mains lead with bipolar plug.
- External plastic box. F type connection. It has an adapter for easy attachment to wall.



## HEADQUARTER

IKUSI - Ángel Iglesias S.A. · Pº Miramón, 170 · 20014 San Sebastián · SPAIN  
Tel.: +34 943 44 88 00 · Fax: +34 943 44 88 20 · television@ikusi.com · www.ikusi.tv



Miembro de la Asociación de Marcas Renombradas Españolas