

GYRO LANYARD DOUBLE INTERNATIONAL CE+ANSI | PAT. PEND

WORK POSITION LANYARD

Ref. 3486 TREE CLIMBING, ROPE ACCESS, TEAM RESCUE

A unique double lanyard for tree climbing. The Gyro Lanyard Double combines two length adjustment systems into a single connection point with the innovative Gyro X3 swivel device.


The Gyro uniquely allows the user to rotate and tilt freely on the single attachment point even while using both lanyard legs.

The retrieving pulley features a minimal design and is equipped with a built-in secondary attachment point. Soft 8 mm polyesteraramid cord integrates with the rope for smooth, precise, and secure length adjustment. Pre-assembled with a Michoacan hitch, also certified with the Catalyst and Distel for the best possibility of customization.

The Iridium 11 mm Heatcore polyamide rope with exclusive CRT (Compact Rope Termination) loops delivers longlasting ease of handling, durability and robustness thanks to the Heatcore technology that joins the sheath and core. High visibility colors.

The adjustment system can be disassembled by the user (Torx T20 allen wrench included) to replace the rope and the cord.

348601 GYRO LANYARD DOUBLE + 3x2125 3.5 m 348602 GYRO LANYARD DOUBLE + 3x2125 5 m 348603 GYRO LANYARD DOUBLE + 3x2125 7 m

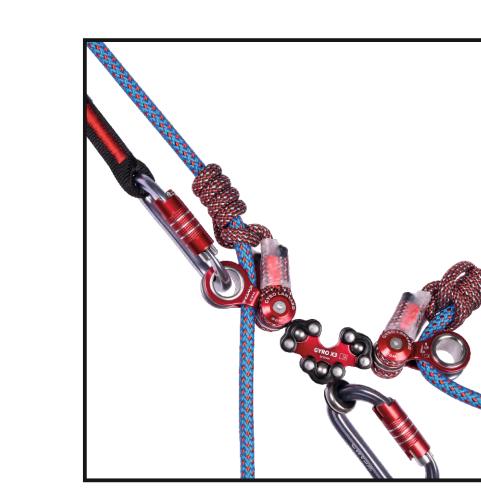

Ref.	Product name Nombre del producto	Weight Peso		(€	ANSI
		9	oz	EN 358	Z133:2017
348601	GYRO LANYARD DOUBLE + 3x2125 3.5 m	950	33.5		•
348602	GYRO LANYARD DOUBLE + 3x2125 5 m	1070	37.8		
348603	GYRO LANYARD DOUBLE + 3x2125 7 m	1220	43.1		



WORK POSITION LANYARD

Ref. 3486 TREE CLIMBING, ROPE ACCESS, TEAM RESCUE INTERNATIONAL CE+ANSI | PAT. PEND

Soft 8 mm polyester-aramid cord integrates with the rope for smooth, precise, and secure length adjustment Pre-assembled with a The retrieving pulley Michoacan hitch, also features a minimal design certified with the **Catalyst** and is equipped with a and **Distel** for the best built-in secondary possibility of customization attachment point **Innovative Gyro X3** triple swivel device. Allows the user to rotate and 11 mm Heatcore Rope: tilt freely on the single polyamide rope delivers attachment point even while long-lasting ease of handling, using both lanyard legs. durability and robustness thanks to the Heatcore technology that joins the sheath and core. High visibility colors

CRT - Compact Rope Termination





WORK POSITION LANYARD

Ref. 3486 TREE CLIMBING, ROPE ACCESS, TEAM RESCUE INTERNATIONAL CE+ANSI | PAT. PEND

The adjustment system can be disassembled by the user (Torx T20 allen wrench included) to replace the rope and the cord.



GYRO LANYARD SPARE ROPE

351601 2 m **351602** 3.5 m **351603** 5 m **351604** 7 m **351605** 10 m Replacement ropes for the Gyro Lanyards.



GYRO LANYARD SPARE CORD 3518

Replacement hitch cord for the Gyro Lanyards.






INTERNATIONAL CE+ANSI | PAT. PEND

WORK POSITION LANYARD

Ref. 3486

TREE CLIMBING, ROPE ACCESS, TEAM RESCUE

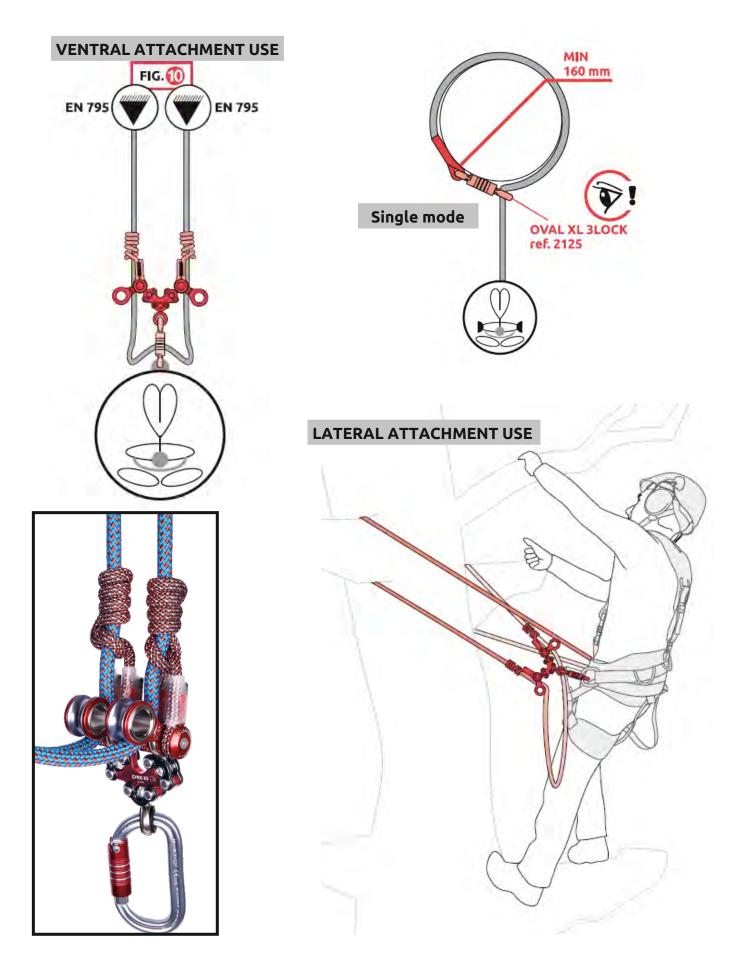




WORK POSITION LANYARD

Ref. 3486

TREE CLIMBING, ROPE ACCESS, TEAM RESCUE

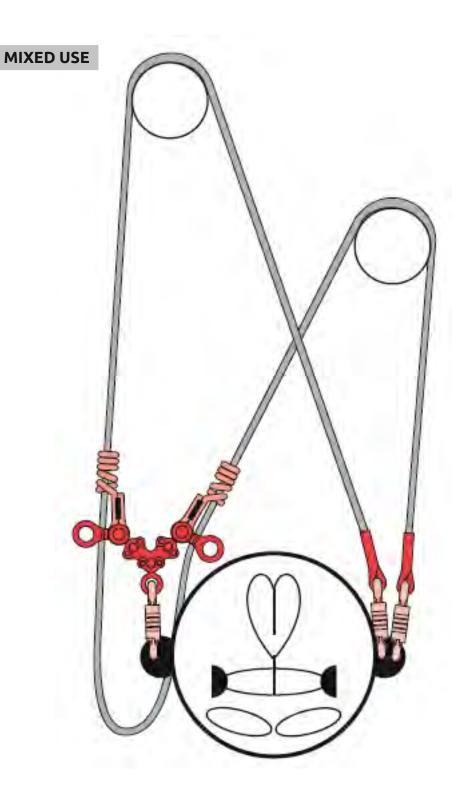

INTERNATIONAL CE+ANSI | PAT. PEND