





EAP-INDUSTRY-31

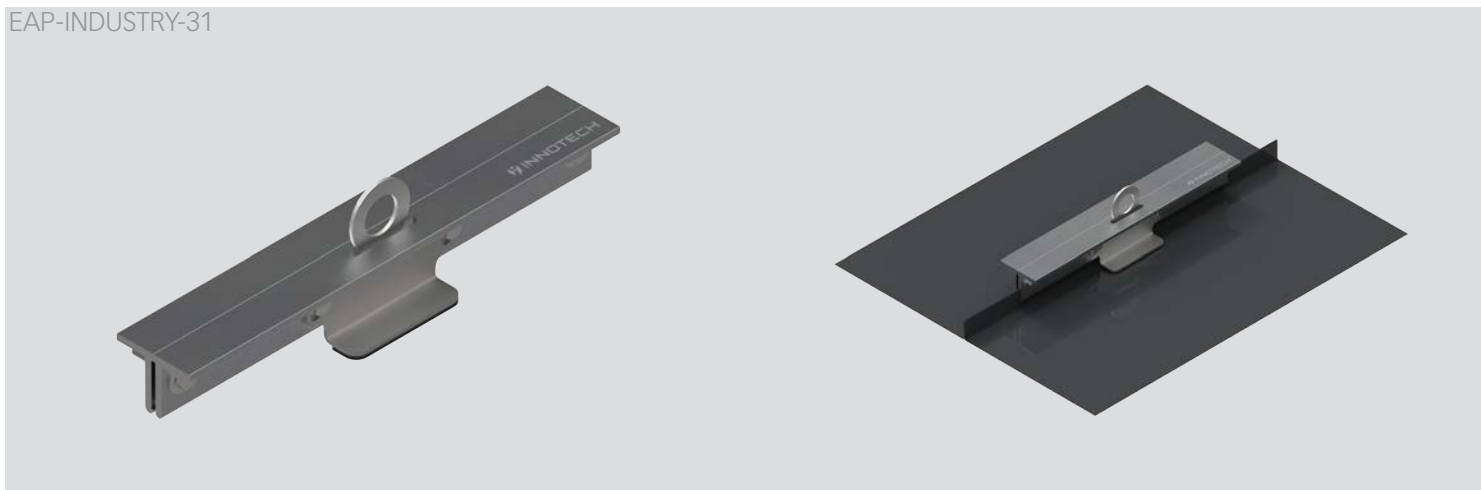

SZH-INDUSTRY-31

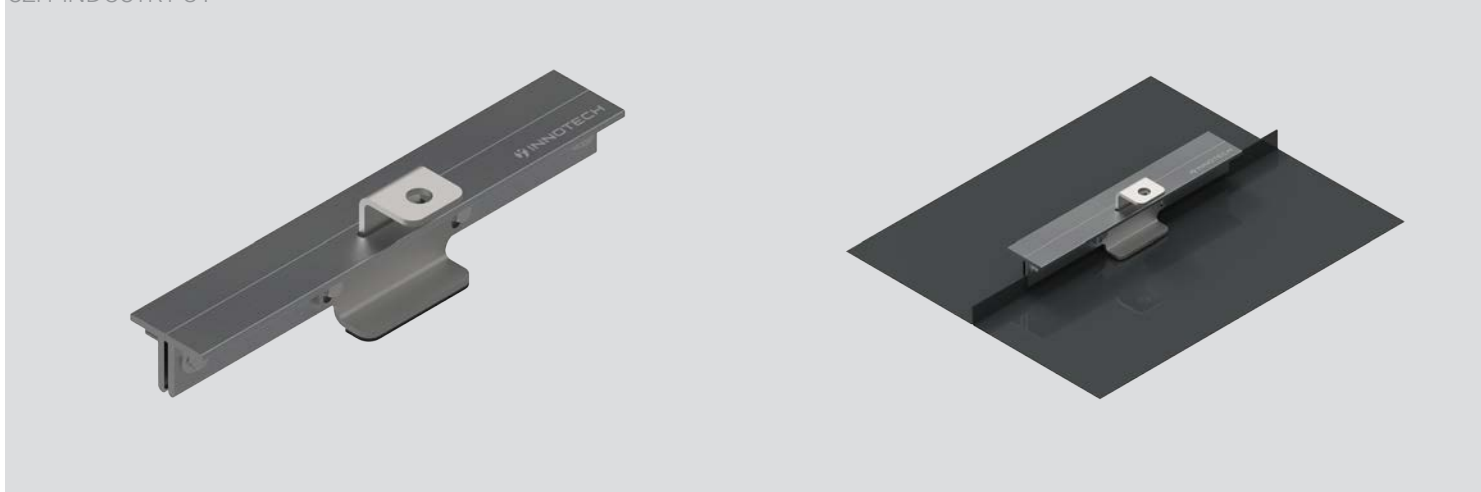

Seam clamp **INDUSTRY-31**

EN

The **INDUSTRY-31** seam clamp from INNOTECH sets itself apart through its exceptional stability. Thanks to its adjustable support it can cover any seam height, thereby offering maximum flexibility for users on the roof. The user also gains flexibility in his use of time, since the preassembled delivery brings enormous time savings.

The **INDUSTRY-31** can be assembled without roof penetration, preventing moisture from entering the roof interior.

- EAP-INDUSTRY-31: single anchor point for personal safety for 2 people
- SZH-INDUSTRY-31: anchor point on flat or slanted roof as intermediate cable bracket in the INNOTECH lifeline system.
- or double standing seam roofs made of steel, aluminium
- alternatively available for copper roofs on demand
- simple and fast installation thanks to preassembled elements
- installation on additional components available at any time
- certified according to the latest state of the art:

EN 795:2012 TYPE A & CEN/TS 16415:2013 (EAP-INDUSTRY-31)
EN 795:2012 TYPE C (SZH-INDUSTRY-31)

EAP-INDUSTRY-31


SINGLE ANCHOR POINT with rotating anchorage eye for standing seam roofs (EN 795 A)

Mountable on: (Double-) standing seam roofs

Material (material thickness): steel (min. 0,5 mm), aluminium (min. 0,7 mm)

Material: aluminium, stainless steel (AISI 304)

Pre-assembled and without roof perforation!

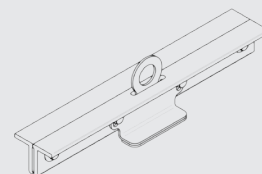

SZH-INDUSTRY-31

INTERMEDIATE CABLE BRACKET in AIO lifeline system for standing seam roofs (EN 795 C)

Mountable on: (Double-) standing seam roofs

Material (material thickness): steel (min. 0,5 mm), aluminium (min. 0,7 mm)

Material: aluminium, stainless steel (AISI 304)

Pre-assembled and without roof perforation!

