


APPLICATIONS

The Tractel® 150kg anchoring rod is a transportable anchoring point that allows two 150kg operators to be secured. For its installation, the 150kg Tracrod anchoring rod is inserted into a stainless-steel base which is permanently fixed to the workstation

Tracrod chair base has been designed to fix the anchor rod on a horizontal surface

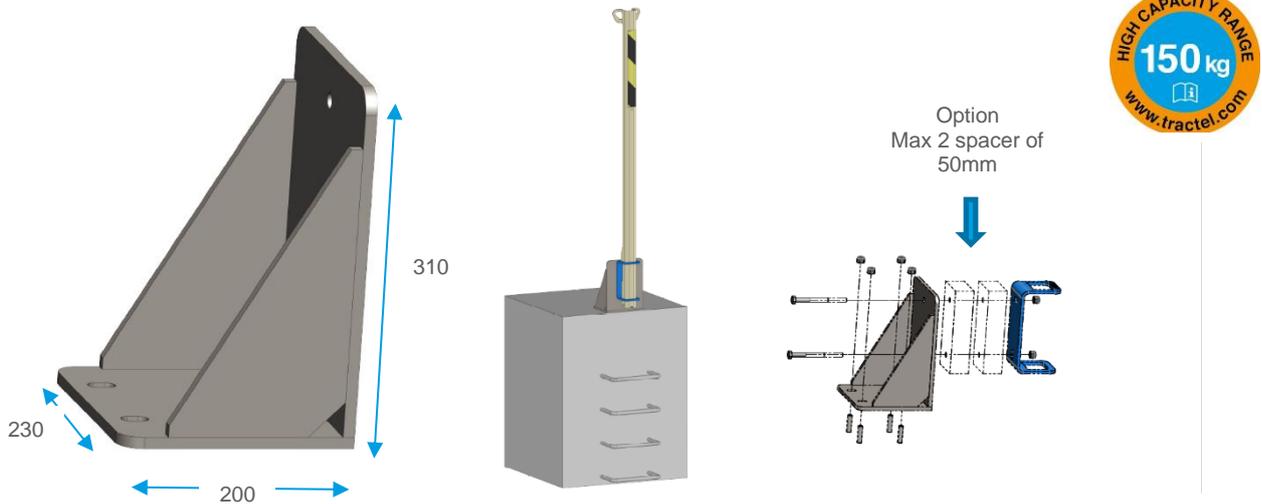

DESCRIPTION

In order for the Tracrod 150kg rod anchor to be installed in the widest range of configurations, Tractel® has created a chair base that is installed on a horizontal surface between the fixing base and the structure.

- The chair base is fixed with four 12mm screws. Breaking strength minimum 1150daN
- Galvanized steel

When installing the chair base, the installer must check the compatibility between the strength of the installation and the host structure. Chemical anchors are not supplied with the base, they must be compatible with the belay support.

TECHNICAL CHARACTERISTICS

Material Galvanised steel

Size: 230x200x310mm

APPLICABLE STANDARDS

The Tracrod 150kg fall arrest anchor complies with the requirements of the following standards:

- EN795A/2012 150kg fall arrest anchor point capable of securing two fall arresters complying with the requirements of EN363 (EN 355; EN353-2; EN360) or EN341 rescue systems.
- Installation of a blocfor™ 20R or 30R 150kg with a bracket complying with the requirements EN360 - EN1496.

MAIN COMPONENTS

Code	Description	EAN Code	Weight (incl. packaging)	Packaging size
210598	Tracrod chair base (galva)	3600232105985	12.6kg	230x200x310mm