

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B023/17**

(3) Product: **Anchor device type A**  
Type: **EAP/SZH-INDUSTRY-31**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 KIRCHHAM, AUSTRIA**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this type examination certificate.

(7) The certification body of DEKRA EXAM GmbH certifies that this product comply with the fundamental requirements of the standard listed under item 8 below. The examination and test results in the test and assessment report PB 17-031.

(8) The requirements of the standard are assured by compliance with

**DIN EN 795:2012**

**DIN CEN/TS 16415:2013**

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2022-06-21.

DEKRA EXAM GmbH  
Bochum, 2017-06-22

signed: Wiegand  
Certification body

signed: Stickdorn  
Special services unit

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Certification body

  
Special services unit

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B023/17**
- (13) 13.1 Subject and Type  
Anchor device type A  
Type: EAP/SZH-INDUSTRY-31

### 13.2 Description

The anchor device of type EAP/SZH-INDUSTRY-31 (Fig. 1) is used to protect maximum two people against falls from a height. It is intended for being mounted on the standing seam roofs (steel  $\geq 0.5$  mm; aluminium  $\geq 0.7$  mm; copper  $\geq 0.6$  mm).

The base consists of two angular profiles which are bolted to each other after they have been placed on the standing seam of the roof. One side of the angular profile is equipped with a long hole which receives the attachment eyelet. The bolting is done using four hexagonal bolts and self-locking nuts.

The anchor device is intended for bearing loads exerted from any direction parallel to the structure surface.

Below there is a summary of further details of the anchor device.

#### Details of anchor device type EAP/SZH-INDUSTRY-31

- Protecting maximum two people at the same time
- Material thickness of angular profile:  $t = 6$  mm
- Length of angular profile:  $l = 395$  mm
- Fastening elements for angular profiles: bolts M8 x 35 mm
- Two plastic screws (M8 x 30 mm) at bracket end for adjustment at structure surface
- Attachment eyelet made of corrosion-resistant material ( $t = 3$  mm)

Instead of the attachment eyelet, anchor wire rope components for wire rope systems of type ALLinONE (anchor device type C according to DIN EN 795:2012) made by INNOTECH Arbeitsschutz GmbH can be mounted. Then, this anchor device is used as an intermediate structural anchor in the system type ALLinONE.

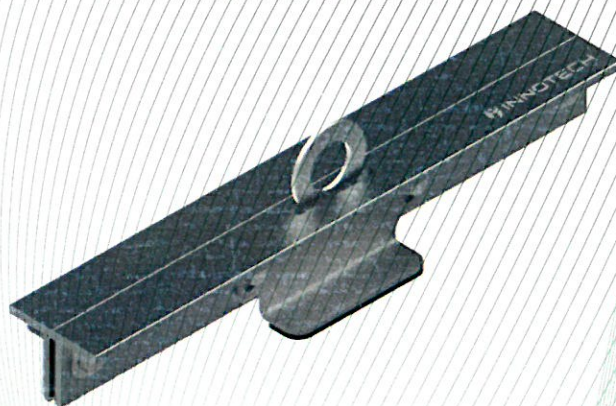


Fig. 1: Anchor device type A, type: EAP/SZH-INDUSTRY-31

- (14) Test and Assessment Report

PB 17-031 dd. 2017-06-16