
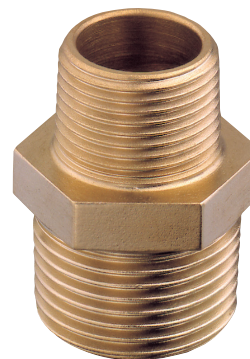


raccorderia ottone pipe fittings brass

0245

Niples doppio ridotto M-M
Reducing nipple M-M

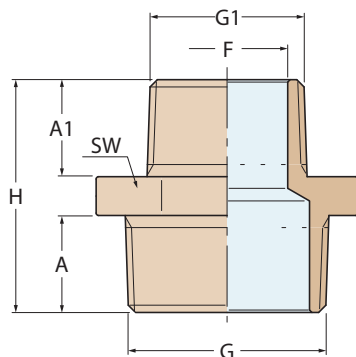

FILETTATURE / THREAD :
G - G1 = EN 10226/1 (BS 21)

	15	25	25	35	40	40	55	60	65	90	90	100	105	170
0245	■	■	■	■	■	■	■	■	■	■	■	■	■	■
0245C						■			■				■	
0245N						■			■			■	■	
Weight (gr)	15	25	25	35	40	40	55	60	65	90	90	100	105	170
SW	16	19	19	22	22	22	28	28	28	35	35	35	35	46
F	6	6	9	6	9	12	9	12	15	9	12	15	20	15
H	23.5	25	28.5	28.5	32	32.5	34	34.5	38	37	37.5	41	42.5	44.5
A1	7.5	7.5	11	7.5	11	11.5	11	16.5	15	11	11.5	15	19	15
A	11	11.5	11.5	15	15	15	16.5	16.5	16.5	19	19	19	19	21.5
G1	1/8"	1/8"	1/4"	1/8"	1/4"	3/8"	1/4"	3/8"	1/2"	1/4"	3/8"	1/2"	3/4"	1/2"
G	1/4"	3/8"	3/8"	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	1"	1"	1"	1"	1 1/4"

	175	185	215	220	230	240	370	380	385	580	850	860	1500
0245	■	■	■	■	■	■	■	■	■	■	■	■	■
0245N			■				■			■			
Weight (gr)	175	185	215	220	230	240	370	380	385	580	850	860	1500
SW	46	46	52	52	52	52	65	65	65	80	93	93	122
F	20	26	15	20	26	34	26	34	40	51	51	65	76
H	46	48.5	45.5	47	49.5	52	54.5	57	57	62.5	66	66.5	75.5
A1	16.5	19	16.5	19	19.5	16.5	19	21.5	21.5	25.5	25.5	26	28.5
A	21.5	21.5	21.5	21.5	21.5	21.5	25.5	25.5	25.5	26	28.5	28.5	34
G1	3/4"	1"	1/2"	3/4"	1"	1 1/4"	1"	1 1/4"	1 1/2"	2"	2"	2 1/2"	3"
G	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	2 1/2"	3"	3"	4"

Ottone sabbiato ■
Yellow brass

0245C



Ottone cromato ■
Chromium-plated brass

0245N



Ottone nichelato ■
Nickel-plated brass