



AUSTRITTSFILTER GV 100


EXHAUST FILTER GV 100

Austrittsfilter werden in der Regel kombiniert mit Filter- oder Dachlüfter eingebaut. Ob ein oder zwei Austrittsfilter eingebaut werden müssen, richtet sich nach der Berechnung der Luftfördermenge und den Gegebenheiten.

Die Austrittsfilter haben die gleiche Schnellbefestigung wie die Filterlüfter LV. Sie werden von außen in den Ausschnitt eingeschnappt. Die Befestigungsbohrungen sind nur bei Schraubbefestigung erforderlich.

As a rule, exhaust filters are installed in conjunction with filter fans. Whether one or two fans are to be fitted depends upon the air-flow calculations and prevailing conditions.

These exhaust filters have the same quick mounting system as the LV series filter fans. They are snapped into the cut-out from outside. Drill holes are only necessary for screw fastening.

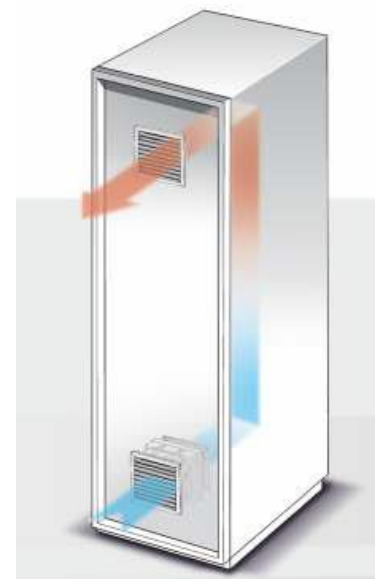

EIGENSCHAFTEN

- Flache Bauform mit Schnellbefestigung
- Schraubbefestigung möglich
- Schutzart IP54 mit Filtermatte G2 (Standard)
- Geschäumte Polyurethan-Dichtung
- Gehäuse aus hochwertigem ABS-Kunststoff, selbstverlöschend nach UL 94 V0
- Gehäusefarbe RAL 7035
- Lieferumfang: einbaufertig, inkl. Filtermatte
- Auch in EMV-Ausführung erhältlich

FEATURES

- Low shape and quick mounting
- Screw fastening is possible
- Protection class IP54 with filter mat G2 (standard)
- Foamed polyurethane gasket
- Housing made of high-quality ABS plastic, self-extinguishing to UL 94 V0
- Housing color RAL 7035
- Scope of supply: ready to install, incl. filter mat
- Also available in EMC version

TECHNISCHE DATEN TECHNICAL DATA

Bezeichnung Type	GV 100
Artikelnummer Part number	11 115 050
Breite Width	105 mm
Höhe Height	105 mm
Tiefe (außen) Depth (outside)	4,5 mm
Max. Einbautiefe Installation depth	12 mm
Montageausbruch Installation cut-out	92 x 92 mm
Einsatztemperatur Operating temperature	-20°C... +65°C
Dichtung Gasket	Aufgeschäumte Dichtung Foamed gasket
Schutzart Degree of protection	IP54 mit Filtermatte G2 IP54 with filter mat G2
Gewicht Weight	46 gr.
Farben Colours	RAL 7035
Zulassung Approval	cURus / CE


MÖGLICHE SONDERAUSFÜHRUNGEN GV 100

- RAL 7032 / RAL 9011
- EMV-Ausführung





POSSIBLE SPECIAL VERSIONS GV 100

- RAL 7032 / RAL 9011
- EMC Version

ZUBEHÖR ACCESSORIES

Bezeichnung Type	Beschreibung Description	Artikelnummer Part number	
AM 115P	Ersatz-Filtermatte P15/150S G2 Replacement filter mat P15/150S G2	12 100 15VE	
KB 100	Kiemenblech Gill plate	14 100 070	

ABMESSUNGEN DIMENSIONS

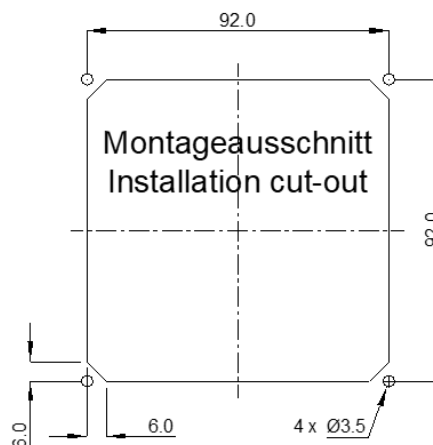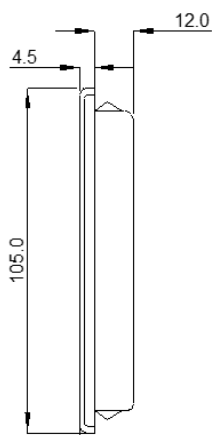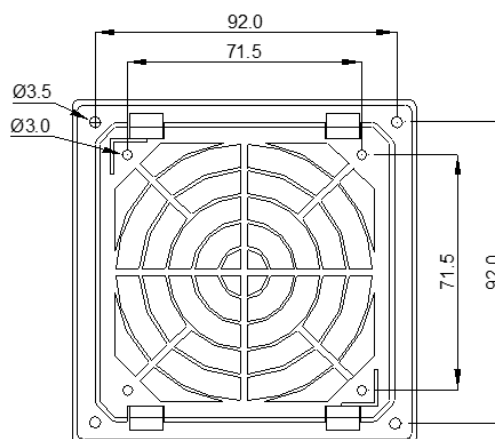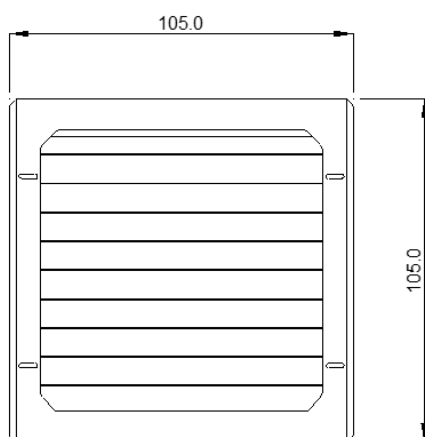

Achteckiger Ausschnitt und Bohrungen nur bei Schraubbefestigung. Alle Maße in mm.
Octagonal cut-out and drill-holes are only necessary for screw-fastening. All dimensions in mm.

LIEFERUMFANG

- Filterlüfter GV 100 inkl. Filtermatte
- Betriebsanleitung

DELIVERY CONTENTS

- Filter Fan GV 100 incl. filter mat
- Instruction manual