

BAHN

1768	BAHN MIRRORS, CHROME	
INFORMATION AND SUPPORT	INFO@BAHNPRODUCTS.COM	866 294 2827

⚠ WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

MAKE SURE THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 1 Left Bahn Mirror Assembly
- 1 Right Bahn Mirror Assembly
- 1 Hardware Kit, Including:
 - 2 5/16"-18 X 1-1/2" Socket Head Cap Screws
 - 2 5/16"-18 X 2" Socket Head Cap Screws
 - 1 2.5MM Hex Wrench
 - 2 5/16" Split Lock Washers
 - 2 5/16" Internal Tooth Lock Washers
 - 2 Double End Threaded Studs
- 1 Installation Instructions

YOU WILL ALSO NEED:

Set of hex wrenches, set of combination wrenches

NOTICE

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future reference.

- STEP 1** Read and understand all **STEPS** in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**.

Mirror adapters (available separately at Kuryakyn.com) are required for installation on metric cruisers.

NOTICE

Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

- STEP 2** Remove both existing mirrors from the lever mounts; set them aside, they will not be re-used.

1768	BAHN MIRRORS, CHROME	
INFORMATION AND SUPPORT	INFO@BAHNPRODUCTS.COM	866 294 2827

MOUNTING WITH SINGLE SCREW (TYPICAL):

STEP 3 Determine which of the included Socket Head Cap Screws from the hardware kit will provide maximum thread engagement in the mirror stem without bottoming out.

STEP 4 Place a Split Lock Washer over the Screw and insert it through the hole in the lever mount. **FIG 1**

STEP 5 Place an Internal Tooth Lock Washer over the protruding end of the Screw.

STEP 6 While holding the mirror in place, thread the Screw into the bottom of the mirror stem.


NOTE: Ensure that the Setscrew in the mirror stem does not prevent the Screw from being installed fully.

FIG 1

STEP 7 Adjust the position of the mirror stem for visibility and clearance; tighten the Screw and then the Setscrew.

STEP 8 Repeat **STEP 3 through STEP 7** for the opposite side.

STEP 9 Adjust the Mirrors for proper view before riding the motorcycle.

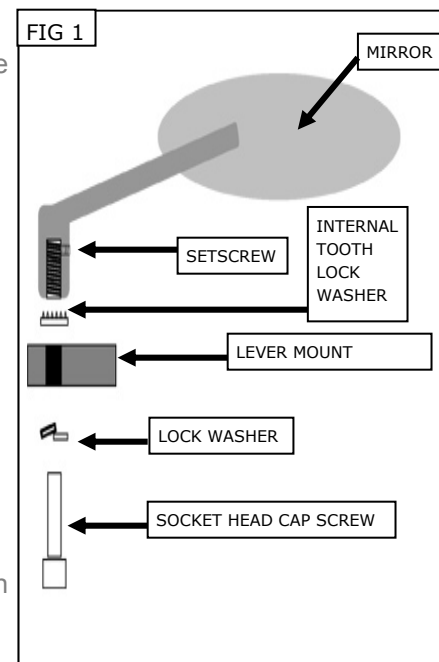

H-D WITH BOTTOM MOUNTED TURN SIGNALS—RIGHT SIDE PROCEDURE:

CAUTION

REMOVING THE RETAINER NUT AND/OR THE BALL STUD CLAMP IN THE NEXT STEP WILL RELEASE THE TURN SIGNALS FROM THE HAND CONTROLS. SECURE THE TURN SIGNALS TO PREVENT DAMAGE OR INJURY.

STEP 10 Screw a Double Ended Stud into the new mirror stem; tighten and then tighten the Setscrew. **FIG 2 on PAGE 3.**

NOTE: Ensure that the Setscrew in the mirror stem does not prevent the Double Ended Stud from being installed fully. **FIG 2 on PAGE 3.**

1768


BAHN MIRRORS, CHROME

INFORMATION AND SUPPORT

INFO@BAHNPRODUCTS.COM

866 294 2827

- STEP 11** Remove the existing mirror; hold the turn signal to prevent it from being damaged.
- STEP 12** Loosen and remove the retainer nut and ball stud clamp shown in FIG 2.
- STEP 13** Place an Internal Tooth Lock Washer over the long end of one of the Double Ended Studs; insert the assembly into the mirror stem hole in the hand control. **FIG 2**
- STEP 14** Place a Split Lock Washer over the protruding end of the Double Ended Stud and thread the retainer nut onto the stud. **FIG 2**
- STEP 15** Adjust the position of the mirror stem for visibility and clearance; tighten the retaining nut.
- STEP 16** Install the ball stud clamp onto the retainer nut; adjust the turn signal and tighten the clamp.
- STEP 17** Repeat **STEP 10 through STEP 16** for the LEFT SIDE.
- STEP 18** Adjust the mirrors for proper view before riding the motorcycle.

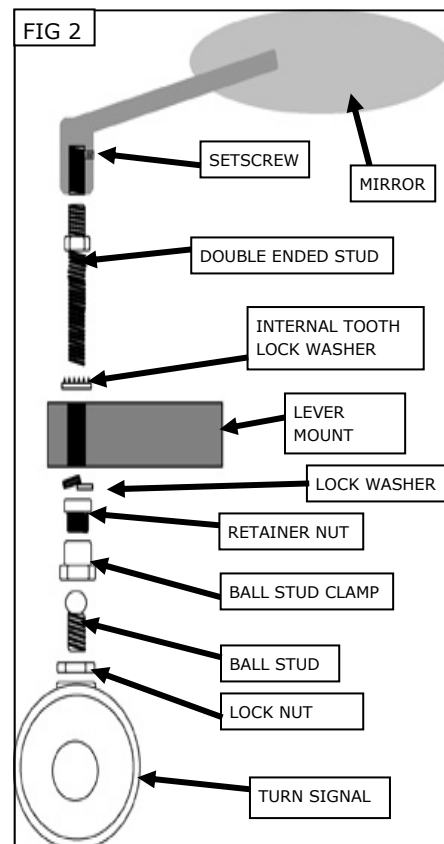

NOTICE

Ensure that the position of the mirror and stem **DO NOT** interfere with the operation of the motorcycle hand controls.

It is the end user's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase where as all other components shall be warranted for one (1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
6. Exhaust systems are warranted for manufacturing defects only. There is no warranty on exhaust pipes & mufflers with regard to any discoloration. Discoloration or "blue-ing" is caused by tuning characteristics, exhaust timing, carburetor jetting, overheating, etc. & is not caused by defective manufacturing.
7. Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer & where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.
8. Merchandise purchased directly from internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.