

MÉDOC

REF 99.1.152 A

AUTOMATIC SAFETY KNIFE WITH RETRACTABLE BLADE

Ideal for all handling work, opening boxes and packaging.

SAFETY • A pressure difference during cutting allows the blade to retract without releasing the handle.



DELIVERED WITH A
ROUNDED EDGE BLADE



ENHANCED
SECURITY



LIGHT



ERGONOMIC



FOR RIGHT & LEFT
HANDED USERS



AVOIDS
MSD's



TECHNICAL SHEET

ERGONOMIC: LIGHT AND COMFORTABLE

SAFETY : A PRESSURE DIFFERENCE DURING CUTTING ALLOWS THE BLADE TO AUTOMATICALLY RETRACT INTO THE KNIFE BODY.



THE PROS



DELIVERED WITH A ROUNDED EDGE BLADE REF 152A.6



LOCKABLE TRIGGER



ERGONOMIC FOR RIGHT AND LEFT HANDED USERS



SPRING RESISTANCE TESTED TO MORE THAN 100,000 HITS

FUNCTIONS



For cutting single-groove cardboards



For cutting double-groove cardboards



For cutting packaging adhesives



For cutting threads and strings



For cutting plastic films

TRIGGER LOCK

ENHANCED SECURITY



LARGE SPACE

AVOID DUST ACCUMULATION



TECHNICAL CHARACTERISTICS

- Light (76g).
- Reversible and retractable blade using spring.
- Easy blade change.
- Prevents hand problems and tendonitis.

BLADE CHANGE


01/ Remove the hatch. The blade appears.




02/ Remove the hatch. The blade appears.



03/ Pull the blade out by pressing the trigger. Carefully remove the blade from the front.

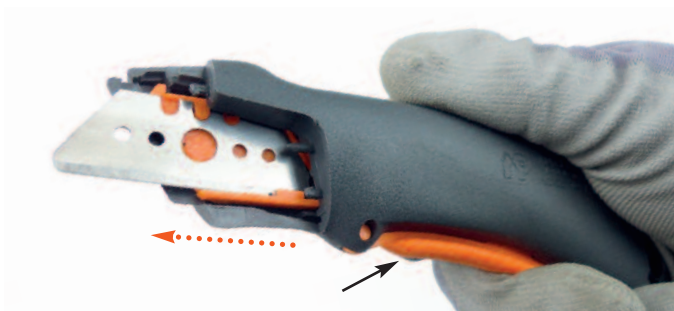


04/ Place a new blade. Release the blade, then the trigger. Close the hatch.

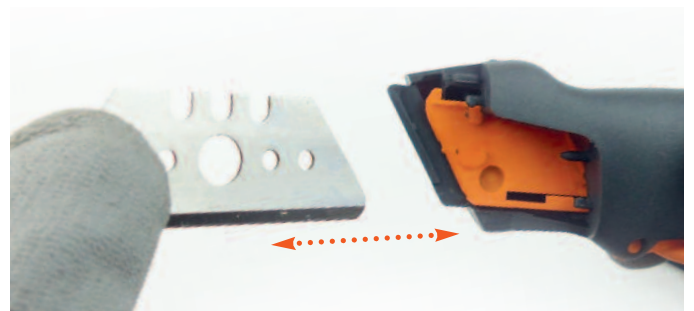


BLADES

DELIVERED WITH

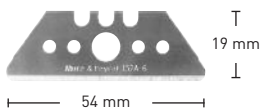


REF 152A.6 THK 0,6 mm
Blade made of premium quality steel.


OTHER COMPATIBLE BLADE

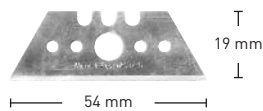


REF 152.6 THK 0,6 mm
Blade made of premium quality steel.

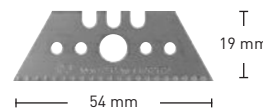


REF 652.6.2 THK 0,6 mm
Blade made of premium quality steel.

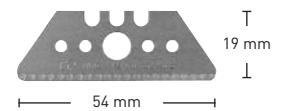

REF 652A.6.2 THK 0,6 mm
Blade made of premium quality steel.

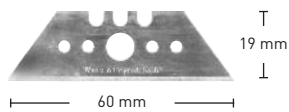


REF 153.6 THK 0,6 mm
Blade made of premium quality steel.

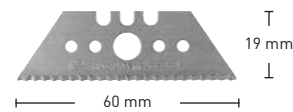

REF 653.6.1 THK 0,6 mm
Blade made of premium quality steel.

Blade Reference	Description	Type	Dimensions (in mm) Length • Width • Thickness	Sharpening Angle	Hardness
152A.6	Straight blade with a rounded edge	Premium quality steel	54 x 19 x 0,6	18° - 27°	64,0 Hrc
152.6	Straight blade	Premium quality steel	54 x 19 x 0,6	18° - 27°	64,0 Hrc
652.6.2	Serrated straight blade	Premium quality steel	54 x 19 x 0,6	15° - 28,5°	64,0 Hrc
652A.6.2	Serrated straight blade with a rounded edge	Premium quality steel	54 x 19 x 0,6	15° - 28,5°	64,0 Hrc
153.6	Straight blade	Premium quality steel	60 x 19 x 0,6	18° - 28°	64,0 Hrc
653.6.1	Serrated straight blade	Premium quality steel	60 x 19 x 0,6	18° - 32°	64,0 Hrc

TECHNICAL SHEET (in mm)

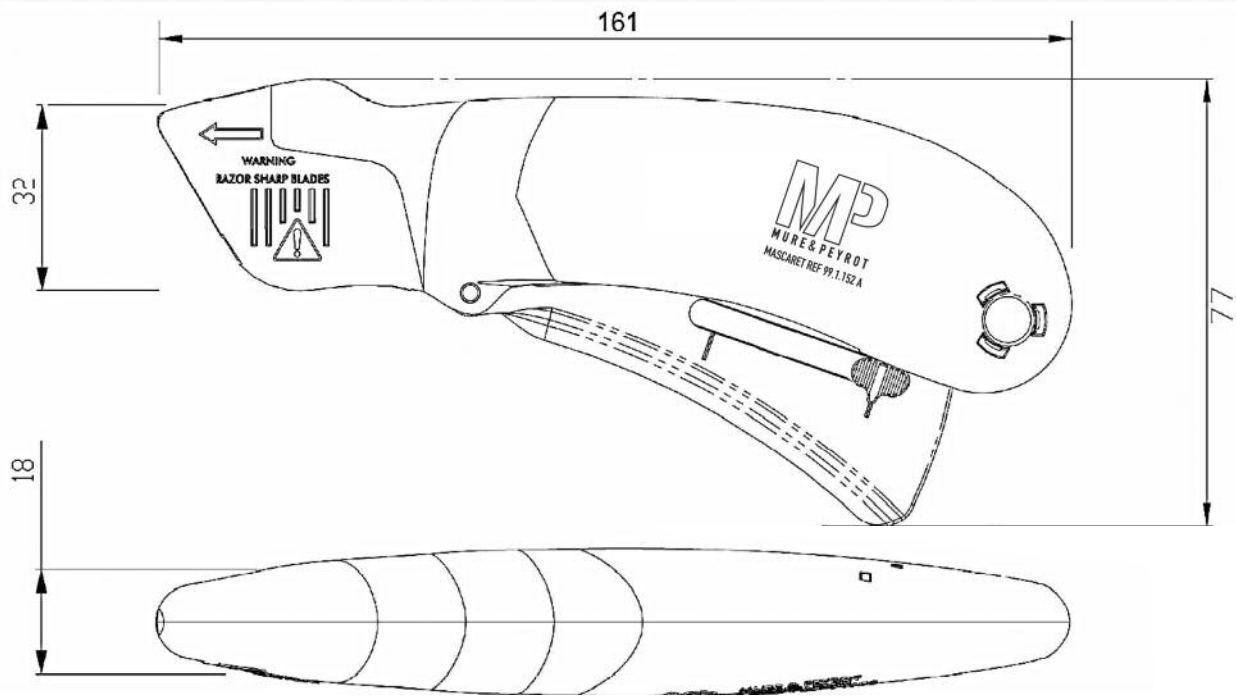

Packaging	Weight PKG	Dimensions (in mm) Length • Width • THK	Quantity PKG	Units	Accessories	Material	Color
SKIN PACK AND BOX	76 g	161 x 77 x 18	10	10 units	2-shell body	PA 6) + FV	Grey
					2 springs	Premium quality steel	Metallic
					Cursor	POM (Polyoxymethylene)	Orange
					Trigger	POM (Polyoxymethylene)	Orange
					Blade holder	POM (Polyoxymethylene)	Orange
					2 rods	PA 6	Orange
					Lame 152A.6	Premium quality steel	Metallic

Registered design, TÜV certified n° Z1A130383194002.

MP
MURE & PEYROT

MURE & PEYROT
25, rue Roger Touton • BP 50120
Parc d'Activités Bordeaux Nord
33041 BORDEAUX CEDEX - FRANCE

Tel.: +33 (0)556 693 200 / Fax: +33 (0)556 693 202 / E-mail: mail@mure-peyrot.com

FOR MORE INFORMATION
MURE-PEYROT.COM